




Waterproof connector

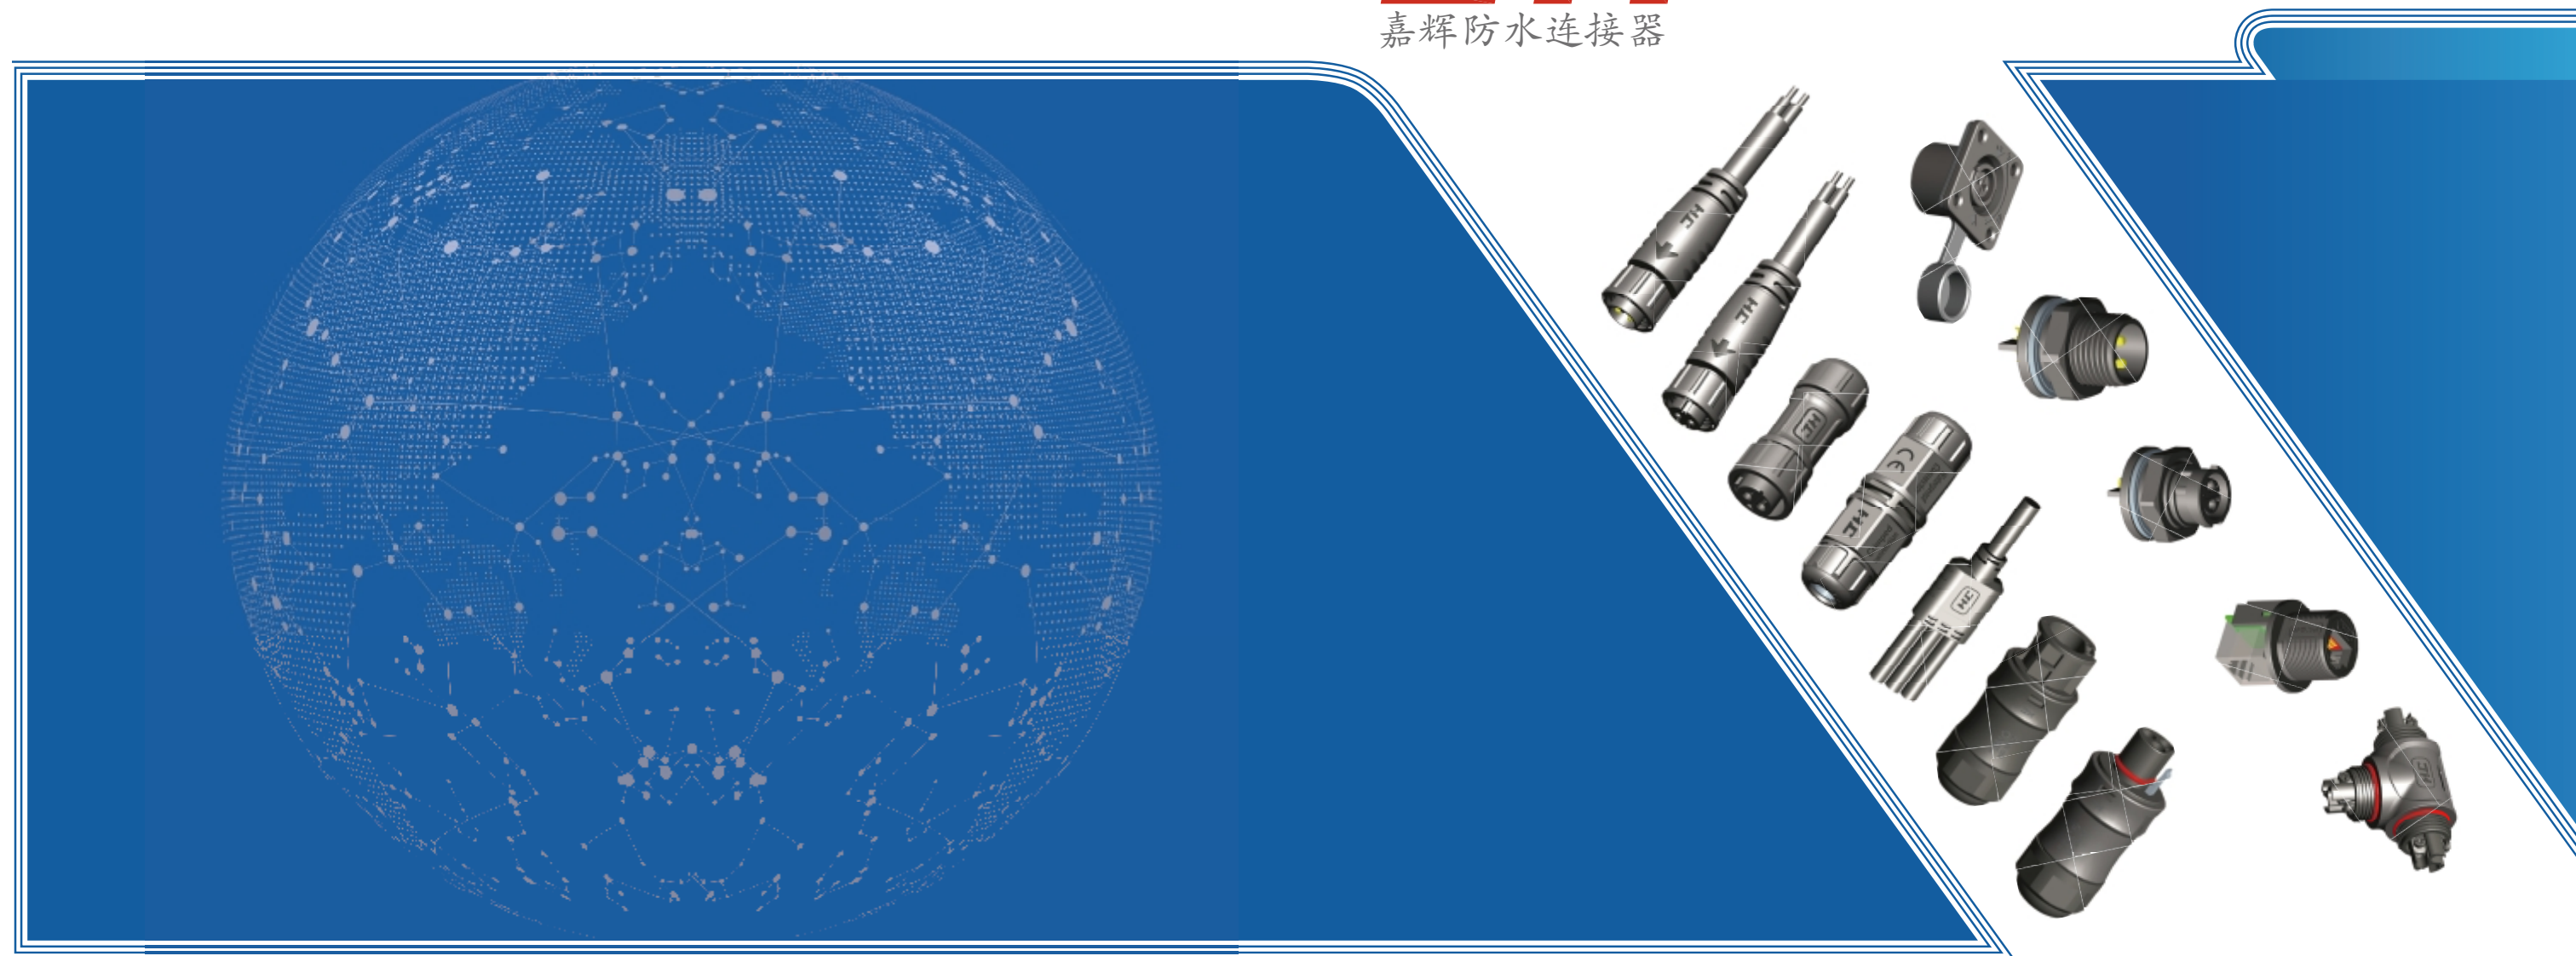

Email: JH@jhplug.com

TEL: 86-769-8768 8018

Http://www.jhplug.com

FAX: 86-769-8768 3380



地址: 广东省东莞市谢岗镇大龙村龙璧工业区三栋四楼

Production base: Floor 4, Bldg.3, Longbi Industrial Zone, Dalong, Xiegang, Dongguan

产 品 目 录 Connector Catalog 2023

深圳市嘉辉实业有限公司
Shenzhen Jiahui industry Co.,Ltd

东莞市嘉辉智能科技有限公司
Dongguan Jiahui industry Technology Co.,Ltd



Shenzhen Jiahui Industrial Co.,Ltd. (Dongguan Jiahui Intelligent Technology Co., Ltd) is a company dedicated to the Waterproof connector of the new generation of enterprises, the company is located in the design capital of the world - Shenzhen. In the process of development, we praise the integrity and professionalism, integrity can only survive in order to be more competitive and professional!

JH Waterproof connector products are widely used in various types of electronics, electrical appliances, lighting, various types of locomotives, medical, aviation and other fields. For domestic and foreign manufacturers to provide quality products and service.

JH business philosophy: IASW (Innovation, Advice, Sincere, Win-win cooperation)

深圳市嘉辉实业有限公司（东莞市嘉辉智能科技有限公司），是一家致力于防水连接器的新生代企业，公司座落在世界设计之都—深圳。在发展过程中，我们推崇诚信和敬业精神，唯有诚信经营才能更具竞争力和专业性！

JH防水连接器产品广泛应用于各类电子、电气设备、照明、各种机车、医疗、航空等领域。为国内和国外厂商提供优质的服务。

JH经营理念：IASW（创新、建议、真诚、双赢）



业务联系



Catalog PDF download
产品目录PDF档

JH 深圳市嘉辉实业有限公司
Shenzhen Jiahui industry Co.,Ltd
东莞市嘉辉智能科技有限公司
Dongguan Jiahui industry Technology Co.,Ltd

地址：广东省东莞市谢岗镇大龙村龙壁工业区三栋四楼

Production base: Floor 4, Bldg.3, Longbi Industrial Zone, Dalong, Xiegang, Dongguan

Email: JH@jhplug.com


Http://www.jhplug.com

TEL: 86-769-8768 8018

FAX: 86-769-8768 3380

JH 深圳市嘉辉实业有限公司
Shenzhen Jiahui industry Co.,Ltd
东莞市嘉辉智能科技有限公司
Dongguan Jiahui industry Technology Co.,Ltd


工厂风采 Factory demeanor





深圳市嘉辉实业有限公司
Shenzhen Jiahui industry Co.,Ltd
东莞市嘉辉智能科技有限公司
Dongguan Jiahui industry Technology Co.,Ltd

Certificates and Patents 证书与专利

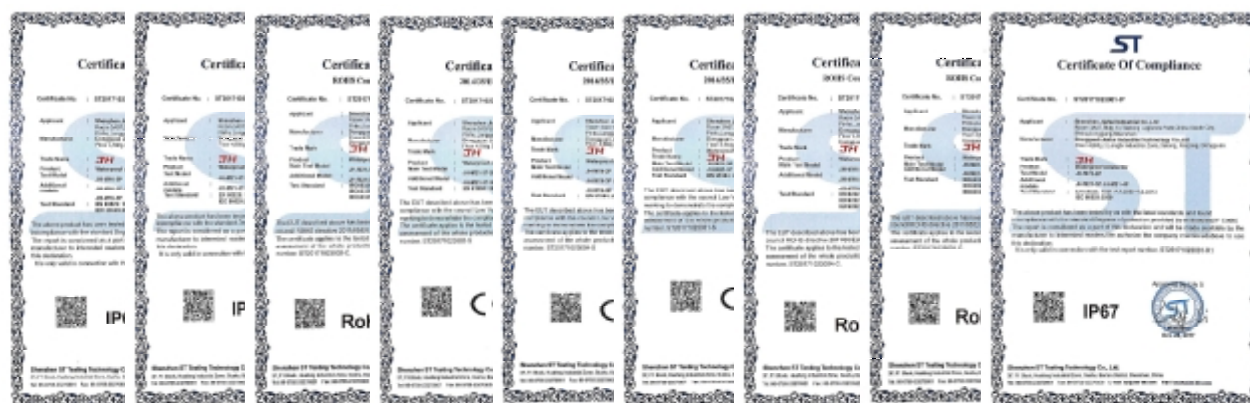


深圳市嘉辉实业有限公司
Shenzhen Jiahui industry Co.,Ltd
东莞市嘉辉智能科技有限公司
Dongguan Jiahui industry Technology Co.,Ltd

Certificates and Patents 证书与专利



JH-M24 series

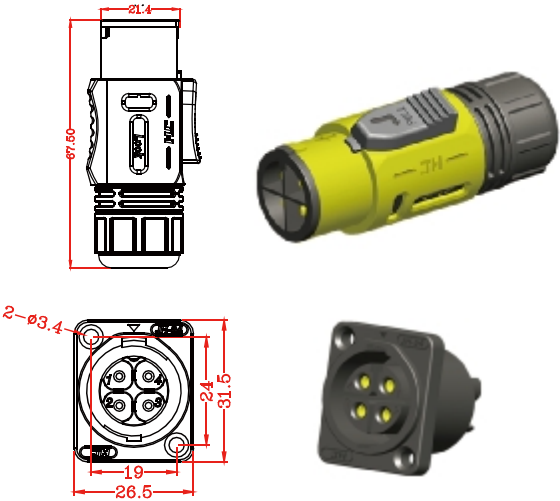


JH-M24-MDM01

Figure No.(图号)
JH-M24-MDM01-2P
JH-M24-MDM01-3P
JH-M24-MDM01-4P
JH-M24-MDM01-8P

JH-M24-FQF01

Figure No.(图号)
JH-M24-FQF01-2P
JH-M24-FQF01-3P
JH-M24-FQF01-4P
JH-M24-FQF01-8P

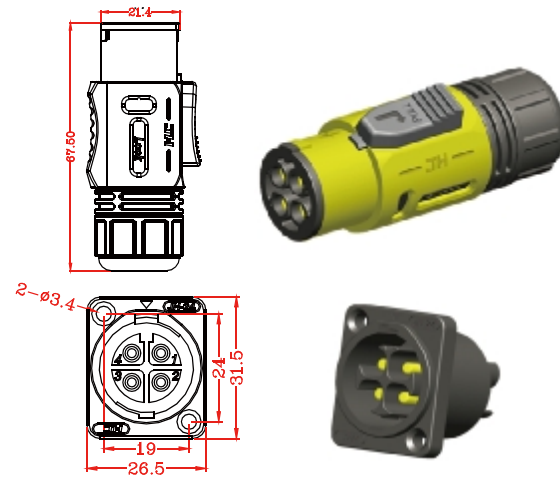

JH-M24-MDF01

Figure No.(图号)
JH-M24-MDF01-2P
JH-M24-MDF01-3P
JH-M24-MDF01-4P
JH-M24-MDF01-8P



JH-M24-FQM01

Figure No.(图号)
JH-M24-FQM01-2P
JH-M24-FQM01-3P
JH-M24-FQM01-4P
JH-M24-FQM01-8P





Simple parameter description:
Rated voltage & current:
2/3/4: 500V DC/AC 25A
8P : 300V DC/AC 8A
Insulation voltage: DC 3KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67 / 68
Operating temperature: -40 ~ 105℃
Assembly cable diameter: 6 ~ 11mm

简要参数描述:
额定电压及电流:
2/3/4: 500V DC/AC 25A
8P : 300V DC/AC 8A
绝缘电压: DC 3KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / 68
工作温度: -40 ~ 105℃
装配电缆直径: 6 ~ 11mm

Installation method

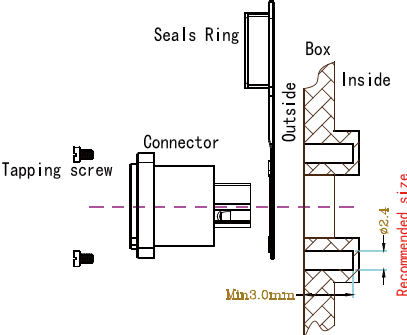


Mark "S"



Customized

P40

JH-25 series

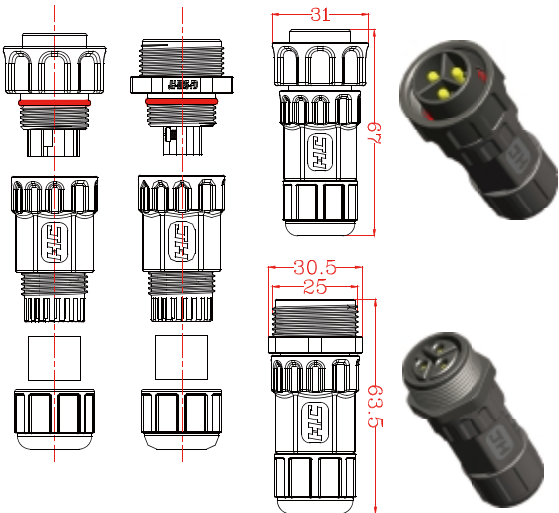


JH-M25-MDM01

Figure No.(图号)
JH-M25-MDM01-2P
JH-M25-MDM01-2S
JH-M25-MDM01-3P
JH-M25-MDM01-3P
JH-M25-MDM01-4P

JH-M25-FDF01

Figure No.(图号)
JH-M25-FDF01-2P
JH-M25-FDF01-2S
JH-M25-FDF01-3P
JH-M25-FDF01-3S
JH-M25-FDF01-4P

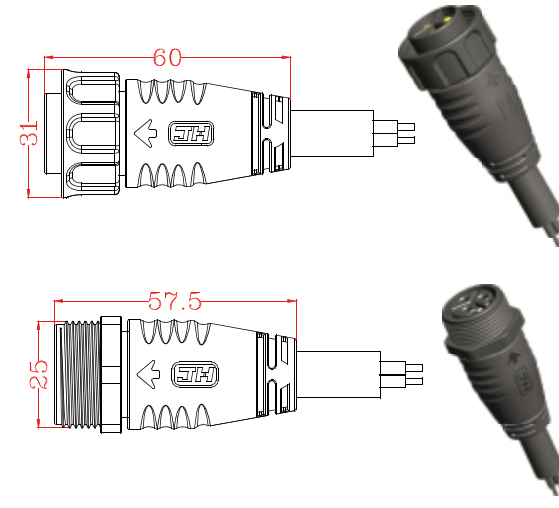

JH-M25-MDM11

Figure No.(图号)
JH-M25-MDM11-2P
JH-M25-MDM11-3P
JH-M25-MDM11-4P

JH-M25-FDF11


Figure No.(图号)
JH-M25-FDF11-2P
JH-M25-FDF11-3P
JH-M25-FDF11-4P



Mark "S"

Simple parameter description:
Rated voltage & current:
2/3/4: 500V DC/AC 30A
Insulation voltage: DC 3KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67 / 68
Operating temperature: -40 ~ 105℃
Assembly cable diameter: 6 ~ 11mm
Moding cable diameter: 6 ~ 14mm

简要参数描述:
额定电压及电流:
2/3/4: 500V DC/AC 30A
绝缘电压: DC 3KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / 68
工作温度: -40 ~ 105℃
装配电缆直径: 6 ~ 11mm
注塑电缆直径: 6 ~ 14mm

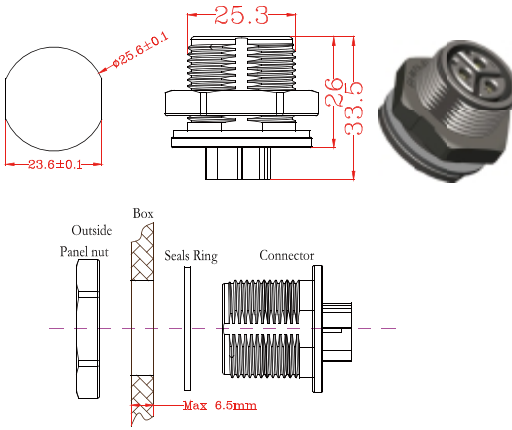

JH-M25-FFF11

Figure No.(图号)
JH-M25-FFF01-2P
JH-M25-FFF01-2S
JH-M25-FFF01-3P
JH-M25-FFF01-3S
JH-M25-FFF01-4P




Figure No.(图号)
JH-M25-FSC01

P41

JH-C01 series

储能设备交流连接器
Energy storage equipment AC connector

JH-C01-MDM01-3S

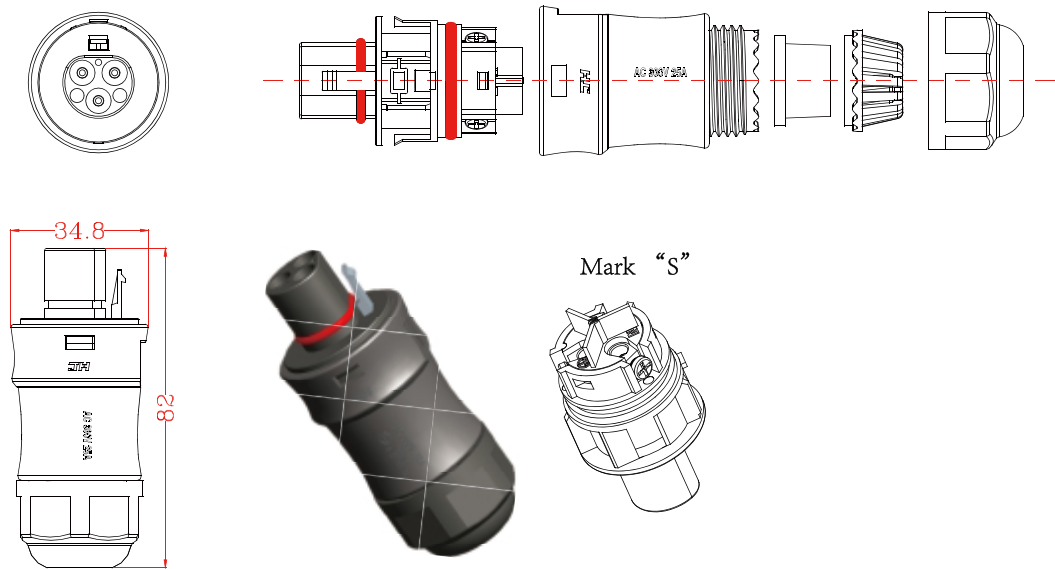

JH-C01-FDF01-3S



Simple parameter description:
Rated voltage & current: 300V DC/AC 25A
Insulation voltage: DC 3750V 2mA 60s
Insulation resistance: DC 1000V 200MΩ
IP-Code: IP67 / 68
Operating temperature: -40 ~105℃
Assembly cable diameter: 9 ~13mm

光伏逆变器交流连接器
Photovoltaic Inverter AC connector

Mark "S"


Mark "S"

简要参数描述:
额定电压及电流: 300V DC/AC 25A
绝缘电压: DC 3750V 2mA 60s
绝缘电阻: DC 1000V 200MΩ
IP防护等级: IP67 / 68
工作温度: -40 ~105℃
装配电缆直径: 9~13mm


JH-C04 series

光伏逆变器直流连接器
Photovoltaic Inverter DC connector


JH-C04-FDM-XX




JH-C04-FRM-XX



JH-C04-MDF-XX




JH-C04-MRF-XX




XX:
14: 14AWG (2.5mm²)
12: 12AWG (4.0mm²)
10: 10AWG (6.0mm²)
08: 8 AWG (10mm²)

可选金属端子: 冲压件




1500V 40A

可选金属端子: 车床件




1500V 70A

可选金属端子: 冲压件




1500V 40A

可选金属端子: 车床件




1500V 70A

两公一母
BC40-2M1F 2 Male to 1 Female

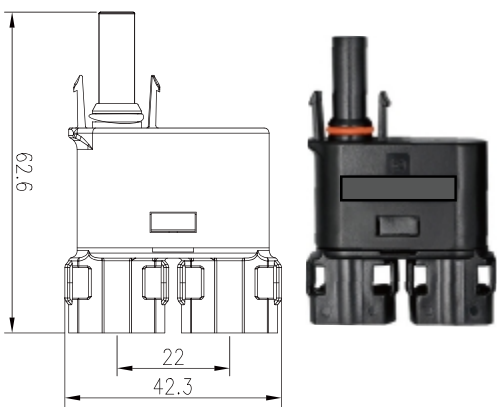


两母一公
BC40-2F1M 2 Female to 1 Male

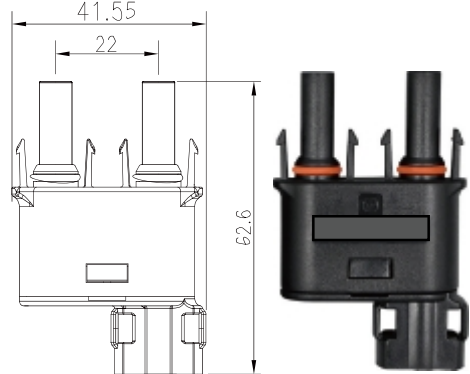


JH-C04 series


三公一母
BC50-3M1F 3 Male to 1 Female

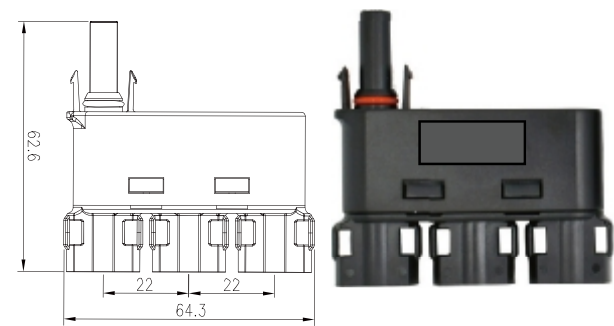

三母一公
BC50-3F1M 3 Female to 1 Male

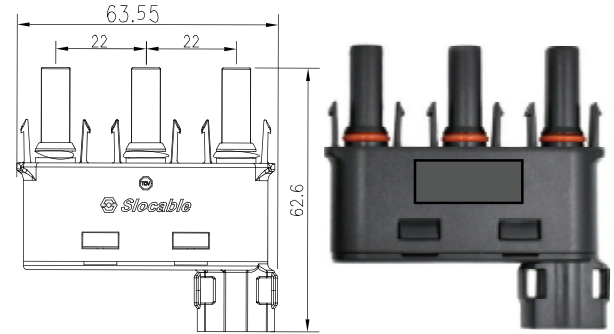

保险丝规格
CN40-FURY- ** FUSE Specification (2~30A)

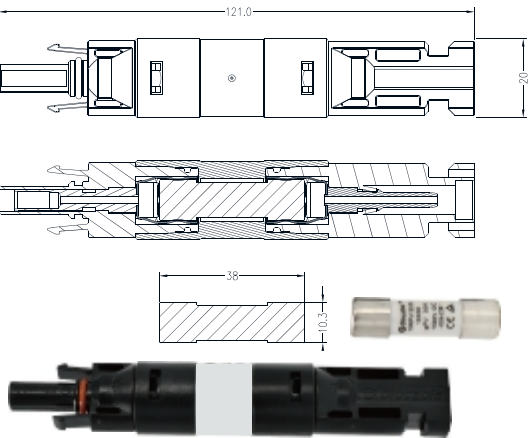

保险丝规格
CN40-FURY- ** FUSE Specification (2~30A)

