




Waterproof connector



Email: JH@jhplug.com
TEL: 86-769-8768 8018
Http://www.jhplug.com
FAX: 86-769-8768 3380

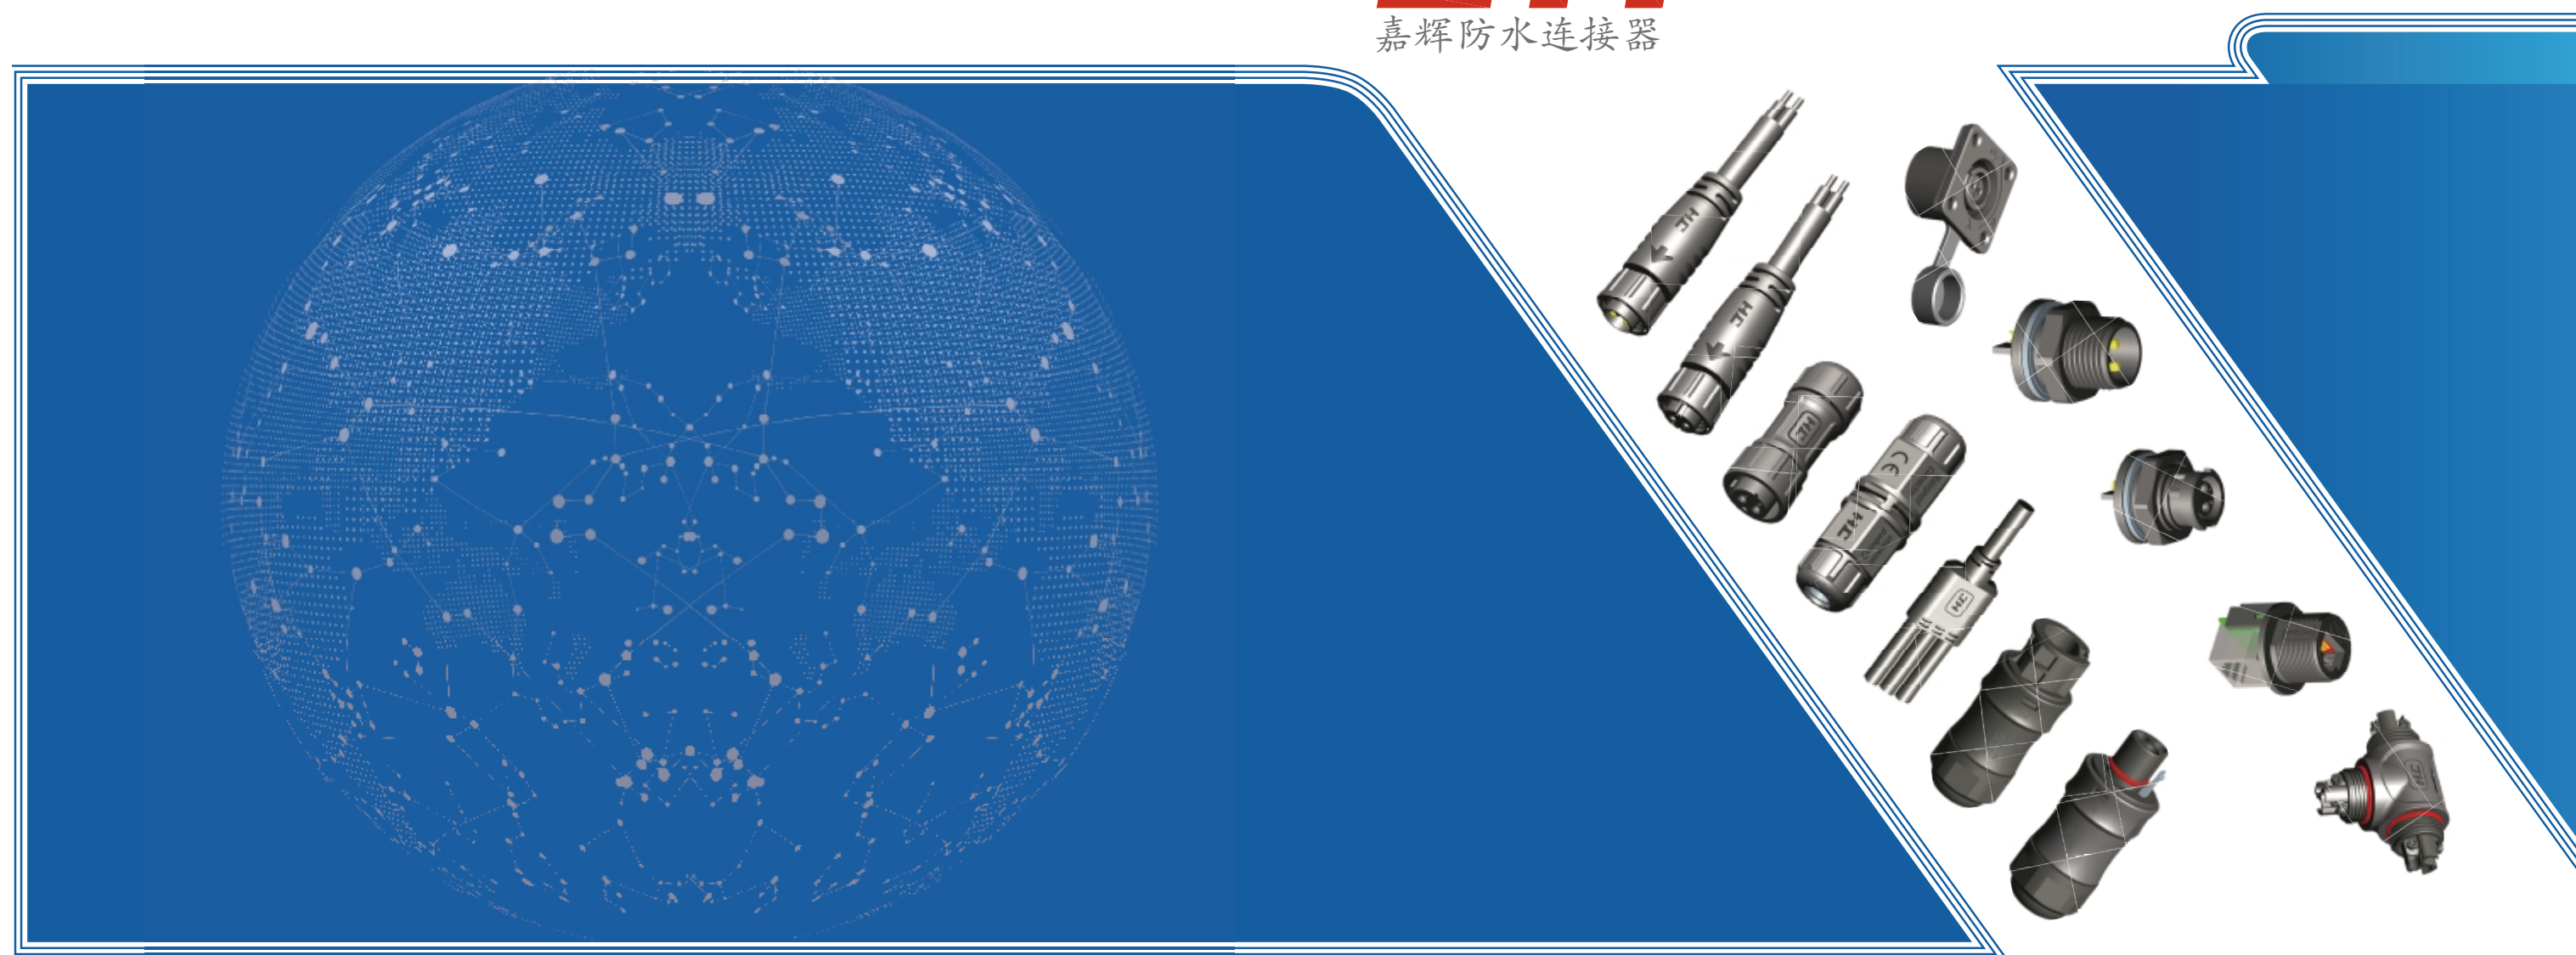

地址: 广东省东莞市谢岗镇大龙村龙璧工业区三栋四楼
Production base: Floor 4, Bldg.3, Longbi Industrial Zone, Dalong, Xiegang, Dongguan

产 品 目 录 Connector Catalog 2023

深圳市嘉辉实业有限公司
Shenzhen Jiahui industry Co.,Ltd
东莞市嘉辉智能科技有限公司
Dongguan Jiahui industry Technology Co.,Ltd



Shenzhen Jiahui Industrial Co.,Ltd. (Dongguan Jiahui Intelligent Technology Co., Ltd) is a company dedicated to the Waterproof connector of the new generation of enterprises, the company is located in the design capital of the world - Shenzhen. In the process of development, we praise the integrity and professionalism, integrity can only survive in order to be more competitive and professional!

JH Waterproof connector products are widely used in various types of electronics, electrical appliances, lighting, various types of locomotives, medical, aviation and other fields. For domestic and foreign manufacturers to provide quality products and service.

JH business philosophy: IASW (Innovation, Advice, Sincere, Win-win cooperation)

深圳市嘉辉实业有限公司（东莞市嘉辉智能科技有限公司），是一家致力于防水连接器的新生代企业，公司座落在世界设计之都—深圳。在发展过程中，我们推崇诚信和敬业精神，唯有诚信经营才能更具竞争力和专业性！

JH防水连接器产品广泛应用于各类电子、电气设备、照明、各种机车、医疗、航空等领域。为国内和国外厂商提供优质的服务。

JH经营理念：IASW（创新、建议、真诚、双赢）



业务联系



Catalog PDF download
产品目录PDF档

JH 深圳市嘉辉实业有限公司
Shenzhen Jiahui industry Co.,Ltd
东莞市嘉辉智能科技有限公司
Dongguan Jiahui industry Technology Co.,Ltd

地址：广东省东莞市谢岗镇大龙村龙壁工业区三栋四楼

Production base: Floor 4, Bldg.3, Longbi Industrial Zone, Dalong, Xiegang, Dongguan

Email: JH@jhplug.com


Http://www.jhplug.com

TEL: 86-769-8768 8018

FAX: 86-769-8768 3380

JH 深圳市嘉辉实业有限公司
Shenzhen Jiahui industry Co.,Ltd
东莞市嘉辉智能科技有限公司
Dongguan Jiahui industry Technology Co.,Ltd


工厂风采 Factory demeanor





深圳市嘉辉实业有限公司
Shenzhen Jiahui industry Co.,Ltd
东莞市嘉辉智能科技有限公司
Dongguan Jiahui industry Technology Co.,Ltd

Certificates and Patents 证书与专利

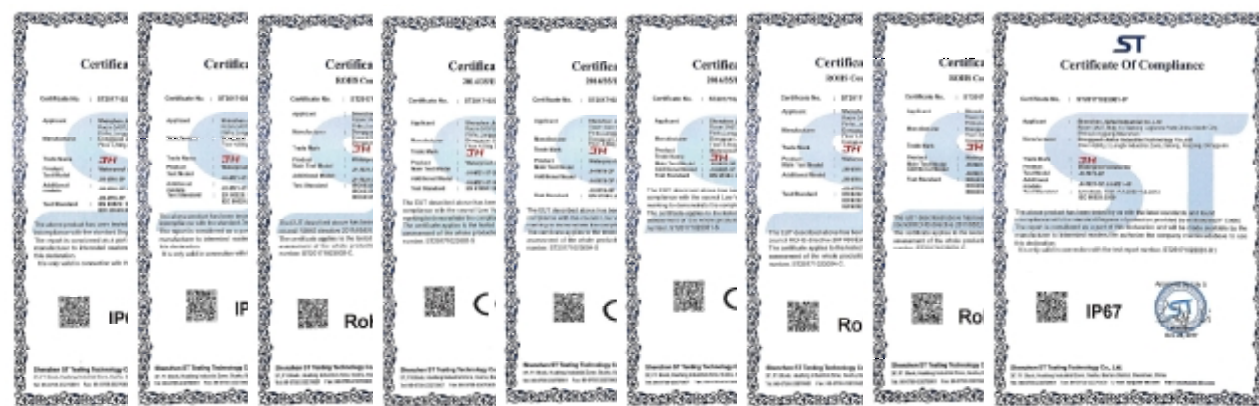

深圳市嘉辉实业有限公司
Shenzhen Jiahui industry Co.,Ltd
东莞市嘉辉智能科技有限公司
Dongguan Jiahui industry Technology Co.,Ltd

Certificates and Patents 证书与专利





JH - M 12 - F D M 0 1 - 2 P - X

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

JH series naming rules

- ① M: Thread / Q: Quick / F: Flange / S: Other stucture
- ② 12: 12 Series / 16: 16 Series / 20: 20 Series / 24: 24 Series
- ③ F: Socket without docking nut / M: Plug with docking nut
- ④ D: Docking / P: Panel / F: Front panel / R: Rear panel
- ⑤ F: Female PIN / M: Male PIN / C: Waterproof cover
- ⑥ 0: Field assemble / 1: Molded with cable / Other: Customized
- ⑦ Distinguishing code
- ⑧ Pins number / A+B: Large+small pin
- ⑨ P: Solder / B: PCB welding / C: Crimped connection / S: Screw connection / Other: Customized
- ⑩ Refer to detailed drawings

JH 系列命名规则

- ① M: 螺纹 / Q: 快卡 / F: 法兰 / S: 其它结构零件
- ② 12: 12系列 / 16: 16系列 / 20: 20系列 / 24: 24系列
- ③ F: 插座端不带对接螺帽 / M: 插头端带对接螺帽
- ④ D: 对接式 / P: 面板式 / F: 前装面板 / R: 后装面板
- ⑤ F: 母针 / M: 公针 / C: 防水盖板
- ⑥ 0: 组装式 / 1: 注塑包胶 / Other: 客户定制
- ⑦ 识别码
- ⑧ Pin 数 / A+B: 大五金+小五金
- ⑨ P: 焊锡 / B: 焊板 / C: 铆压 / S: 螺丝压接 / Other: 定制
- ⑩ 标识代码, 参考详细图纸

JH-8 series

P8

JH-10 series

P9

JH-12 series

P10-P20

JH-16 series

P21-P30

JH-20 series

P31-P39

JH-24 series

P40

JH-25 series

P41

JH-C01 series

P42

JH-JSQ series

P43

JH-RJ45 series

P44-P45

JH-Y series

P46-P47

JH-T series

P48-P49

JH-L21 series

P50-51

JH-KJ series

P52-53

JH-Other series

P54-P55

JH-8 series

JH-M8-MDF11

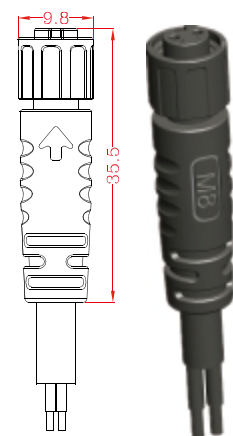


Figure No.(图号)

JH-M8-MDF11-2P-X
JH-M8-MDF11-3P-X
JH-M8-MDF11-4P-X

Simple parameter description:

Pins number: 2/3/4
Rated voltage: 60V DC/AC
Rated current: 3A
Insulation voltage: DC 1KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67
Operating temperature: -40 ~ 105°C
Molding cable diameter: 2~6mm

PIN layout(插针排列方式):



简要参数描述:

插针数: 2/3/4
额定电压: 60V DC/AC
额定电流: 3A
绝缘电压: DC 1KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67
工作温度: -40 ~ 105°C
注塑电缆直径: 2~6mm

JH-M8-FDM11

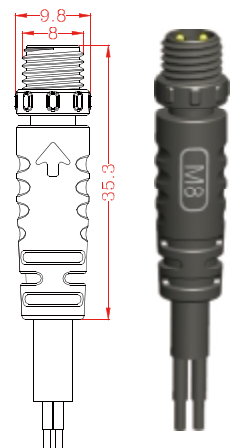



Figure No.(图号)

JH-M8-FDM11-2P-X
JH-M8-FDM11-3P-X
JH-M8-FDM11-4P-X

Simple parameter description:

Pins number: 2/3/4
Rated voltage: 60V DC/AC
Rated current: 3A
Insulation voltage: DC 1KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67
Operating temperature: -40 ~ 105°C
Molding cable diameter: 2~6mm

PIN layout(插针排列方式):

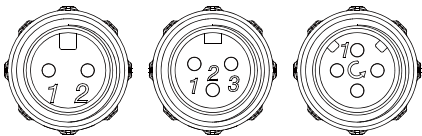

简要参数描述:

插针数: 2/3/4
额定电压: 60V DC/AC
额定电流: 3A
绝缘电压: DC 1KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67
工作温度: -40 ~ 105°C
注塑电缆直径: 2~6mm

JH-10 series

JH-M10-MDF11

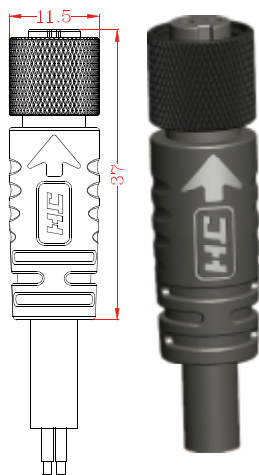



Figure No.(图号)

JH-M10-MDF11-2P-X
JH-M10-MDF11-3P-X
JH-M10-MDF11-4P-X
JH-M10-MDF11-2+3P-X

Simple parameter description:

Pins number: 2/3/4/2+3
Rated voltage: 60V DC/AC
Rated current: 8A (8A+3A)
Insulation voltage: DC 1KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67
Operating temperature: -40 ~ 105°C
Molding cable diameter: 2-6mm

PIN layout(插针排列方式):



简要参数描述:

插针数: 2/3/4/2+3
额定电压: 60V DC/AC
额定电流: 8A (8A+3A)
绝缘电压: DC 1KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67
工作温度: -40 ~ 105°C
注塑电缆直径: 2~6mm

JH-M10-FDM11

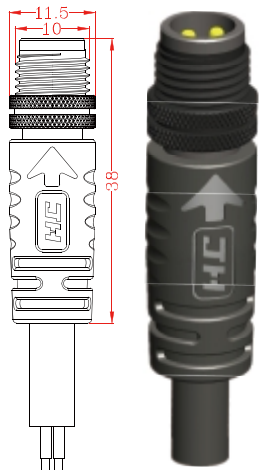



Figure No.(图号)

JH-M8-FDM11-2P-X
JH-M8-FDM11-3P-X
JH-M8-FDM11-4P-X
JH-M8-FDM11-2+3P-X

Simple parameter description:

Pins number: 2/3/4/2+3
Rated voltage: 60V DC/AC
Rated current: 8A (8A+3A)
Insulation voltage: DC 1KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67
Operating temperature: -40 ~ 105°C
Molding cable diameter: 2-6mm

PIN layout(插针排列方式):



简要参数描述:

插针数: 2/3/4/2+3
额定电压: 60V DC/AC
额定电流: 8A (8A+3A)
绝缘电压: DC 1KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67
工作温度: -40 ~ 105°C
注塑电缆直径: 2~6mm



Application scenario
应用场景


P10

Plug(插头端)


Different series for your choice:
1:Male PIN or female pin;
2:Thread docking or quick docking.

可选择不同系列
1: 公针或母针;
2: 螺纹对接或快卡对接。

螺纹对接
Thread nut



快卡对接
Quick nut



Socket (插座端)

Different series for your choice:
1:Male PIN or female pin;
2:Thread docking or quick docking;
3:Front panel or rear panel or flange.

可选择不同系列
1: 公针或母针;
2: 螺纹对接或快卡对接;
3: 前装面板或后装面板或法兰安装。




深圳市嘉辉实业有限公司
东莞市嘉辉智能科技有限公司

[Http://www.jhplug.com](http://www.jhplug.com) [Http://www.jhsocket.com](http://www.jhsocket.com)

JH-12 series

Plug with female PIN (母针插头)

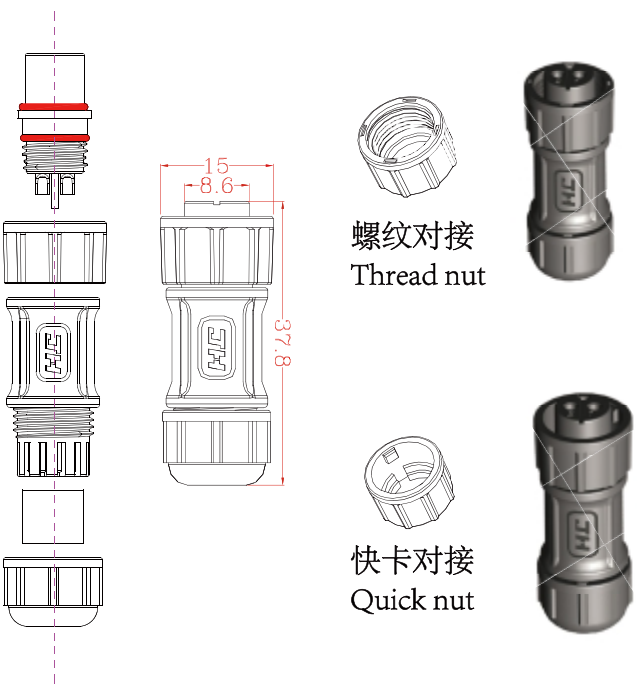

螺纹对接
Thread nut

快卡对接
Quick nut


JH-M12-MDF01

JH-Q12-MDF01


Figure No.(图号)
JH-M12-MDF01-2P-X
JH-M12-MDF01-3P-X
JH-M12-MDF01-4P-X
JH-M12-MDF01-2+3P-X
JH-M12-MDF01-6P-X
JH-M12-MDF01-8P-X

Figure No.(图号)
JH-Q12-MDF01-2P-X
JH-Q12-MDF01-3P-X
JH-Q12-MDF01-4P-X
JH-Q12-MDF01-2+3P-X
JH-Q12-MDF01-6P-X
JH-Q12-MDF01-8P-X

PIN layout
(插针排列)



Plug with male PIN (公针插头)

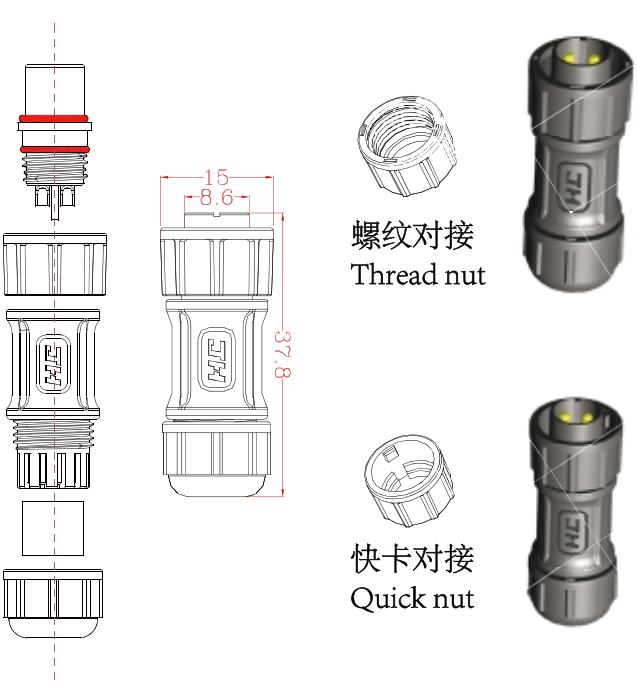

螺纹对接
Thread nut

快卡对接
Quick nut


JH-M12-MDM01

JH-Q12-MDM01

Figure No.(图号)
JH-M12-MDM01-2P-X
JH-M12-MDM01-3P-X
JH-M12-MDM01-4P-X
JH-M12-MDM01-5P-X
JH-M12-MDM01-8P-X

Figure No.(图号)
JH-Q12-MDM01-2P-X
JH-Q12-MDM01-3P-X
JH-Q12-MDM01-4P-X
JH-Q12-MDM01-5P-X
JH-Q12-MDM01-8P-X

PIN layout
(插针排列)




Simple parameter description:
Rated voltage: 60V DC/AC
Rated current: 8A/3A (8A+3A)
Insulation voltage: DC 1KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67 / IP68
Operating temperature: -40 ~105℃
Assembly cable diameter: 3~6.5mm

简要参数描述:
额定电压: 60V DC/AC
额定电流: 8A/3A (8A+3A)
绝缘电压: DC 1KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / IP68
工作温度: -40 ~105℃
装配电缆直径: 3~6.5mm

JH-12 series

Docking socket with male PIN (公针对接插座)

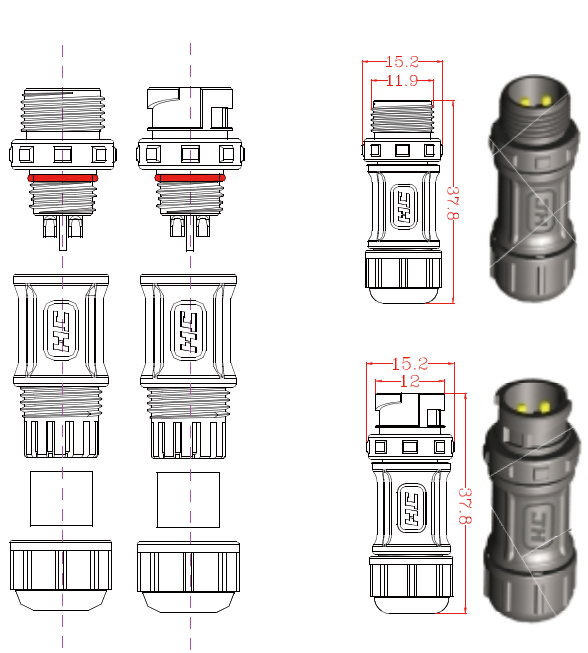


JH-M12-FDM01

JH-Q12-FDM01


Figure No.(图号)
JH-M12-FDM01-2P-X
JH-M12-FDM01-3P-X
JH-M12-FDM01-4P-X
JH-M12-FDM01-2+3P-X
JH-M12-FDM01-6P-X
JH-M12-FDM01-8P-X

Figure No.(图号)
JH-Q12-FDM01-2P-X
JH-Q12-FDM01-3P-X
JH-Q12-FDM01-4P-X
JH-Q12-FDM01-2+3P-X
JH-Q12-FDM01-6P-X
JH-Q12-FDM01-8P-X

PIN layout
(插针排列)



Docking socket with female PIN (母针对接插座)

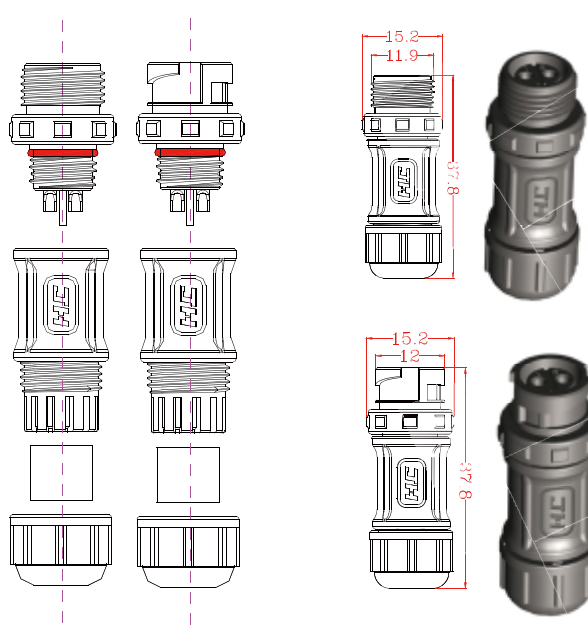


JH-M12-FDF01

JH-Q12-FDF01

Figure No.(图号)
JH-M12-FDF01-2P-X
JH-M12-FDF01-3P-X
JH-M12-FDF01-4P-X
JH-M12-FDF01-5P-X
JH-M12-FDF01-8P-X

Figure No.(图号)
JH-Q12-FDF01-2P-X
JH-Q12-FDF01-3P-X
JH-Q12-FDF01-4P-X
JH-Q12-FDF01-5P-X
JH-Q12-FDF01-8P-X

PIN layout
(插针排列)




Simple parameter description:
Rated voltage: 60V DC/AC
Rated current: 8A/3A (8A+3A)
Insulation voltage: DC 1KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67 / IP68
Operating temperature: -40 ~105℃
Assembly cable diameter: 3~6.5mm

简要参数描述:
额定电压: 60V DC/AC
额定电流: 8A/3A (8A+3A)
绝缘电压: DC 1KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / IP68
工作温度: -40 ~105℃
装配电缆直径: 3~6.5mm

JH-12 series


Plug with female PIN - Molding (母针插头-成型)

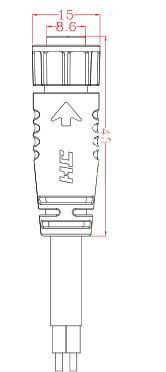

螺纹对接
Thread nut



快卡对接
Quick nut



螺纹对接
Thread nut



快卡对接
Quick nut

JH-M12-MDF11

Figure No.(图号)
JH-M12-MDF11-2P-X
JH-M12-MDF11-3P-X
JH-M12-MDF11-4P-X
JH-M12-MDF11-2+3P-X
JH-M12-MDF11-6P-X
JH-M12-MDF11-8P-X

JH-Q12-MDF11

Figure No.(图号)
JH-Q12-MDF11-2P-X
JH-Q12-MDF11-3P-X
JH-Q12-MDF11-4P-X
JH-Q12-MDF11-2+3P-X
JH-Q12-MDF11-6P-X
JH-Q12-MDF11-8P-X


JH-M12-MDF11-WT

Figure No.(图号)
JH-M12-MDF11-2P-WT
JH-M12-MDF11-3P-WT
JH-M12-MDF11-4P-WT
JH-M12-MDF11-2+3P-WT
JH-M12-MDF11-6P-WT
JH-M12-MDF11-8P-WT

JH-Q12-MDF11-WT


Figure No.(图号)
JH-Q12-MDF11-2P-WT
JH-Q12-MDF11-3P-WT
JH-Q12-MDF11-4P-WT
JH-Q12-MDF11-2+3P-WT
JH-Q12-MDF11-6P-WT
JH-Q12-MDF11-8P-WT

PIN layout
(插针排列)



Simple parameter description:
Rated voltage: 60V DC/AC
Rated current: 8A/3A (8A+3A)
Insulation voltage: DC 1KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP66 / IP67
Operating temperature: -40 ~ 105°C
Molding cable diameter: 2~9mm


Plug with male PIN - Molding (公针插头-成型)

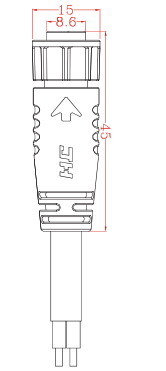

螺纹对接
Thread nut



快卡对接
Quick nut



螺纹对接
Thread nut



快卡对接
Quick nut

JH-M12-MDM11

Figure No.(图号)
JH-M12-MDM11-2P-X
JH-M12-MDM11-3P-X
JH-M12-MDM11-4P-X
JH-M12-MDM11-5P-X
JH-M12-MDM11-8P-X

JH-Q12-MDM11

Figure No.(图号)
JH-Q12-MDM11-2P-X
JH-Q12-MDM11-3P-X
JH-Q12-MDM11-4P-X
JH-Q12-MDM11-5P-X
JH-Q12-MDM11-8P-X


JH-M12-MDM11-WT

Figure No.(图号)
JH-M12-MDM11-2P-WT
JH-M12-MDM11-3P-WT
JH-M12-MDM11-4P-WT
JH-M12-MDM11-5P-WT
JH-M12-MDM11-8P-WT

JH-Q12-MDM11-WT

Figure No.(图号)
JH-Q12-MDM11-2P-WT
JH-Q12-MDM11-3P-WT
JH-Q12-MDM11-4P-WT
JH-Q12-MDM11-5P-WT
JH-Q12-MDM11-8P-WT





PIN layout
(插针排列)



简要参数描述:
额定电压: 60V DC/AC
额定电流: 8A/3A (8A+3A)
绝缘电压: DC 1KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP66 / IP67
工作温度: -40 ~ 105°C
注塑电缆直径: 2~9mm

JH-12 series

Docking socket with male PIN - Molding (公针对接插座-成型)

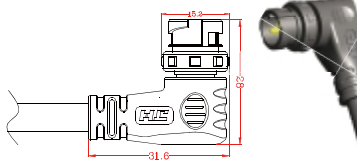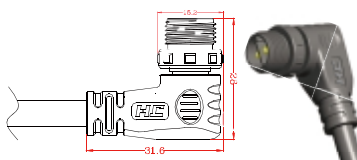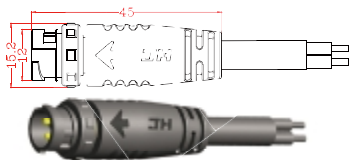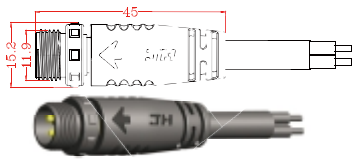

JH-M12-FDM11

Figure No.(图号)
JH-M12-FDM11-2P-X
JH-M12-FDM11-3P-X
JH-M12-FDM11-4P-X
JH-M12-FDM11-2+3P-X
JH-M12-FDM11-6P-X
JH-M12-FDM11-8P-X

JH-Q12-FDM11

Figure No.(图号)
JH-Q12-FDM11-2P-X
JH-Q12-FDM11-3P-X
JH-Q12-FDM11-4P-X
JH-Q12-FDM11-2+3P-X
JH-Q12-FDM11-6P-X
JH-Q12-FDM11-8P-X


JH-M12-FDM11-WT

Figure No.(图号)
JH-M12-FDM11-2P-WT
JH-M12-FDM11-3P-WT
JH-M12-FDM11-4P-WT
JH-M12-FDM11-2+3P-WT
JH-M12-FDM11-6P-WT
JH-M12-FDM11-8P-WT

JH-Q12-FDM11-WT





Figure No.(图号)
JH-Q12-FDM11-2P-WT
JH-Q12-FDM11-3P-WT
JH-Q12-FDM11-4P-WT
JH-Q12-FDM11-2+3P-WT
JH-Q12-FDM11-6P-WT
JH-Q12-FDM11-8P-WT

PIN layout
(插针排列)



Simple parameter description:
Rated voltage: 60V DC/AC
Rated current: 8A/3A (8A+3A)
Insulation voltage: DC 1KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP66 / IP67
Operating temperature: -40 ~ 105°C
Molding cable diameter: 2~9mm

Docking socket with female PIN - Molding (母针对接插座-成型)

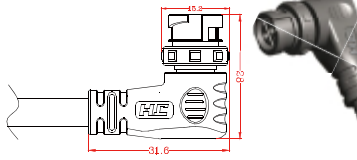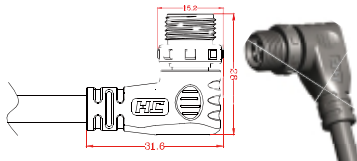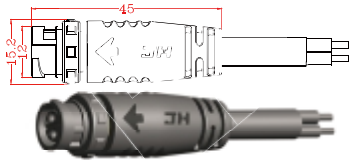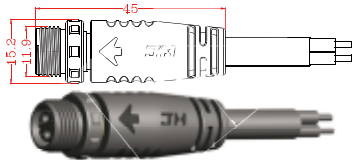

JH-M12-FDF11

Figure No.(图号)
JH-M12-FDF11-2P-X
JH-M12-FDF11-3P-X
JH-M12-FDF11-4P-X
JH-M12-FDF11-5P-X
JH-M12-FDF11-8P-X

JH-Q12-FDF11

Figure No.(图号)
JH-Q12-FDF11-2P-X
JH-Q12-FDF11-3P-X
JH-Q12-FDF11-4P-X
JH-Q12-FDF11-5P-X
JH-Q12-FDF11-8P-X


JH-M12-FDF11-WT

Figure No.(图号)
JH-M12-FDF11-2P-WT
JH-M12-FDF11-3P-WT
JH-M12-FDF11-4P-WT
JH-M12-FDF11-5P-WT
JH-M12-FDF11-8P-WT

JH-Q12-FDF11-WT

Figure No.(图号)
JH-Q12-FDF11-2P-WT
JH-Q12-FDF11-3P-WT
JH-Q12-FDF11-4P-WT
JH-Q12-FDF11-5P-WT
JH-Q12-FDF11-8P-WT

PIN layout
(插针排列)



简要参数描述:
额定电压: 60V DC/AC
额定电流: 8A/3A (8A+3A)
绝缘电压: DC 1KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP66 / IP67
工作温度: -40 ~ 105°C
注塑电缆直径: 2~9mm

JH-12 series

JH-12 series

Front panel socket (前装面板插座)

Rear panel socket (后装面板插座)

JH-M12-FFM01

JH-M12-FFF01

JH-M12-FRM01

JH-M12-FRF01



Figure No.(图号)
JH-M12-FFM01-2P-X
JH-M12-FFM01-3P-X
JH-M12-FFM01-4P-X
JH-M12-FFM01-2+3P-X
JH-M12-FFM01-6P-X
JH-M12-FFM01-8P-X




Figure No.(图号)
JH-M12-FFF01-2P-X
JH-M12-FFF01-3P-X
JH-M12-FFF01-4P-X
JH-M12-FFF01-5P-X
JH-M12-FFF01-8P-X




Figure No.(图号)
JH-M12-FRM01-2P-X
JH-M12-FRM01-3P-X
JH-M12-FRM01-4P-X
JH-M12-FRM01-2+3P-X
JH-M12-FRM01-6P-X
JH-M12-FRM01-8P-X



Figure No.(图号)
JH-M12-FRF01-2P-X
JH-M12-FRF01-3P-X
JH-M12-FRF01-4P-X
JH-M12-FRF01-5P-X
JH-M12-FRF01-8P-X




Regular style
常规款式
Mark: 01





Extended style
加长款式
Mark: 02


Panel cutout




Installation method

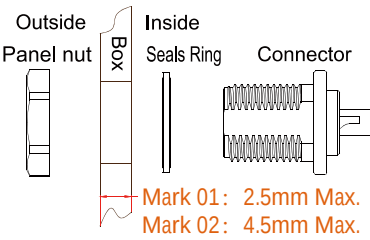

Panel cutout



Installation method



JH-M12-FFM01

JH-Q12-FFF01

JH-Q12-FRM01

JH-Q12-FRF01



Figure No.(图号)
JH-Q12-FFM01-2P-X
JH-Q12-FFM01-3P-X
JH-Q12-FFM01-4P-X
JH-Q12-FFM01-2+3P-X
JH-Q12-FFM01-6P-X
JH-Q12-FFM01-8P-X




Figure No.(图号)
JH-Q12-FFF01-2P-X
JH-Q12-FFF01-3P-X
JH-Q12-FFF01-4P-X
JH-Q12-FFF01-5P-X
JH-Q12-FFF01-8P-X




Figure No.(图号)
JH-Q12-FRM01-2P-X
JH-Q12-FRM01-3P-X
JH-Q12-FRM01-4P-X
JH-Q12-FRM01-2+3P-X
JH-Q12-FRM01-6P-X
JH-Q12-FRM01-8P-X



Figure No.(图号)
JH-Q12-FRF01-2P-X
JH-Q12-FRF01-3P-X
JH-Q12-FRF01-4P-X
JH-Q12-FRF01-5P-X
JH-Q12-FRF01-8P-X




Regular style
常规款式
Mark: 01





Extended style
加长款式
Mark: 02


Panel cutout




Installation method

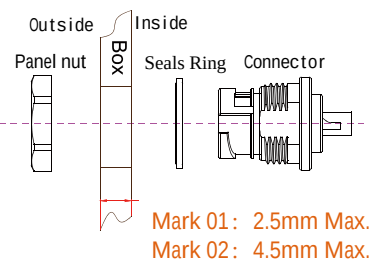

Panel cutout




Installation method



JH-12 series

Flange panel socket (法兰面板插座)

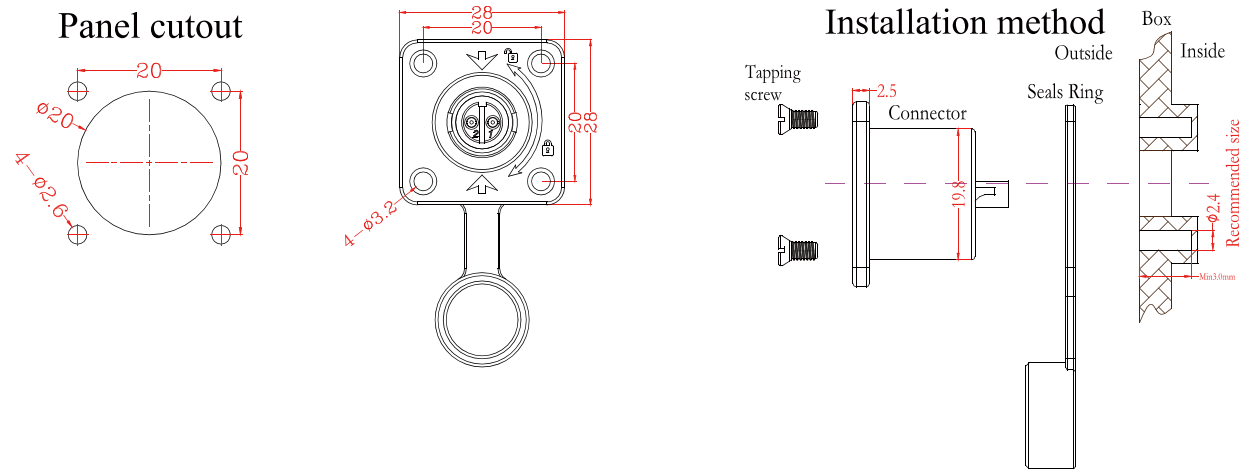


Flange socket with male PIN (公针法兰插座)



JH-F12-FRM02

Figure No.(图号)
JH-F12-FRM02-2P-X
JH-F12-FRM02-3P-X
JH-F12-FRM02-4P-X
JH-F12-FRM02-2+3P-X
JH-F12-FRM02-6P-X
JH-F12-FRM02-8P-X



Simple parameter description:
Rated voltage: 60V DC/AC
Rated current: 8A/3A (8A+3A)
Insulation voltage: DC 1KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67 / IP68
Operating temperature: -40 ~ 105℃

简要参数描述:
额定电压: 60V DC/AC
额定电流: 8A/3A (8A+3A)
绝缘电压: DC 1KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / IP68
工作温度: -40 ~ 105℃

Flange socket with female PIN (母针法兰插座)



JH-F12-FRF02

Figure No.(图号)
JH-F12-FRF02-2P-X
JH-F12-FRF02-3P-X
JH-F12-FRF02-4P-X
JH-F12-FRF02-5P-X
JH-F12-FRF02-8P-X

简要参数描述:
额定电压: 60V DC/AC
额定电流: 8A/3A (8A+3A)
绝缘电压: DC 1KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / IP68
工作温度: -40 ~ 105℃

JH-12 series

Extended products (延伸产品)




Figure No.(图号)
JH-M12-MDF12-2(.....)P
JH-Q12-MDF12-2(.....)P
JH-M12-MDM12-2(.....)P
JH-Q12-MDM12-2(.....)P
JH-M12-FDM12-2(.....)P
JH-Q12-FDM12-2(.....)P
JH-M12-FDF12-2(.....)P
JH-Q12-FDF12-2(.....)P

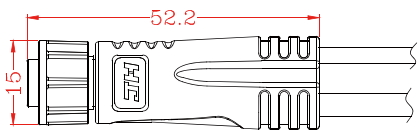


Figure No.(图号)
JH-M12-MDF13-2(.....)P
JH-Q12-MDF13-2(.....)P
JH-M12-MDM13-2(.....)P
JH-Q12-MDM13-2(.....)P
JH-M12-FDM13-2(.....)P
JH-Q12-FDM13-2(.....)P
JH-M12-FDF13-2(.....)P
JH-Q12-FDF13-2(.....)P

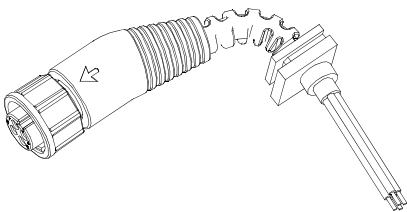


Figure No.(图号)
JH-M12-MDF13-2(.....)P
JH-Q12-MDF13-2(.....)P
JH-M12-MDM12-2(.....)P
JH-Q12-MDM12-2(.....)P




Figure No.(图号)
Male PIN(公针): JH-M12T03F-M
Female PIN(母针): JH-M12T03F-F





Figure No.(图号)
Male PIN(公针): JH-Q12T03F-M
Female PIN(母针): JH-Q12T03F-F

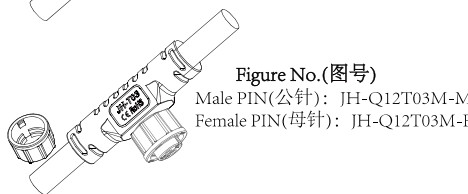
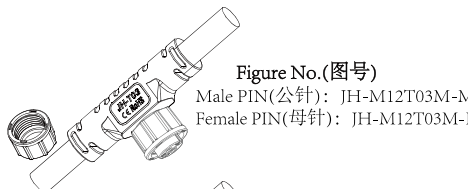



Figure No.(图号)
Male PIN(公针): JH-M12T03M-M
Female PIN(母针): JH-M12T03M-F

Figure No.(图号)
Male PIN(公针): JH-Q12T03M-M
Female PIN(母针): JH-Q12T03M-F

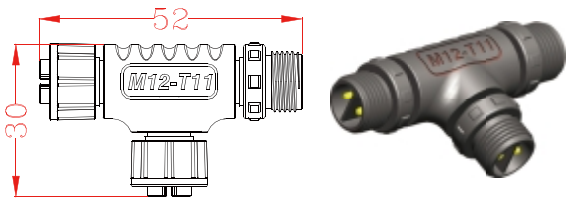


Figure No.(图号)
JH-M12-T11-XXX

JH-12 series

Waterproof cover (防水盖)

JH-M12-FDC01


JH-Q12-FDC01

JH-M12-MDC01


JH-Q12-MDC01




Schematic diagram of usage
安装示意图

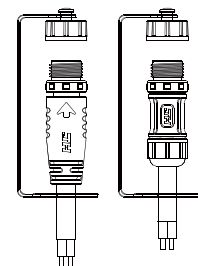


Schematic diagram of usage
安装示意图



Schematic diagram of usage
安装示意图





Schematic diagram of usage
安装示意图



JH-M12-FRC01





Schematic diagram of usage
安装示意图

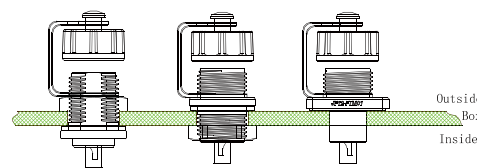

JH-Q12-FRC01



Schematic diagram of usage
安装示意图

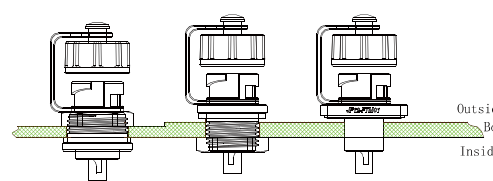

P20

Plug(插头端)


Different series for your choice:
1: Male PIN or female pin;
2: Thread docking or quick docking.

可选择不同系列
1: 公针或母针;
2: 螺纹对接或快卡对接。

螺纹对接
Thread nut



快卡对接
Quick nut



Socket (插座端)

Different series for your choice:
1: Male PIN or female pin;
2: Thread docking or quick docking;
3: Front panel or rear panel or flange.

可选择不同系列
1: 公针或母针;
2: 螺纹对接或快卡对接;
3: 前装面板或后装面板或法兰安装。



JH-16 Series




深圳市嘉辉实业有限公司
东莞市嘉辉智能科技有限公司
[Http://www.jhplug.com](http://www.jhplug.com) [Http://www.jhsocket.com](http://www.jhsocket.com)

P21

JH-16 series

Plug with female PIN (母针插头)

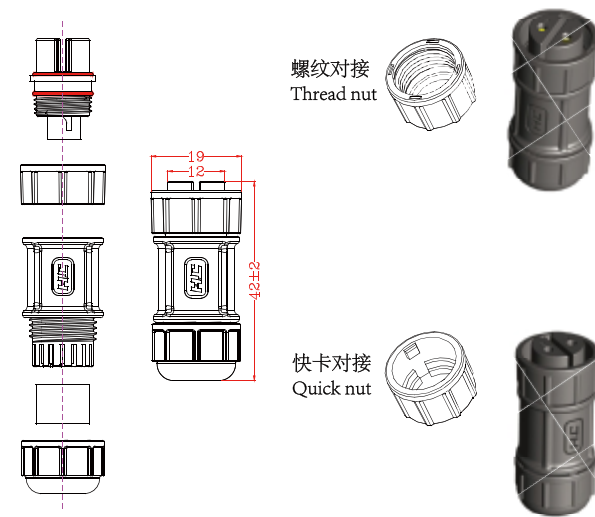


螺纹对接
Thread nut

快卡对接
Quick nut

JH-M16-MDF01


Figure No.(图号)
JH-M16-MDF01-2P-X
JH-M16-MDF01-2S-X
JH-M16-MDF01-3P-X
JH-M16-MDF01-3S-X
JH-M16-MDF01-4P-X
JH-M16-MDF01-5P-X
JH-M16-MDF01-2+3P-X
JH-M16-MDF01-6P-X
JH-M16-MDF01-2+4P-X
JH-M16-MDF01-3+3P-X
JH-M16-MDF01-8P-X
JH-M16-MDF01-10P-X
JH-M16-MDF01-12P-X

PIN layout
(插针排列)

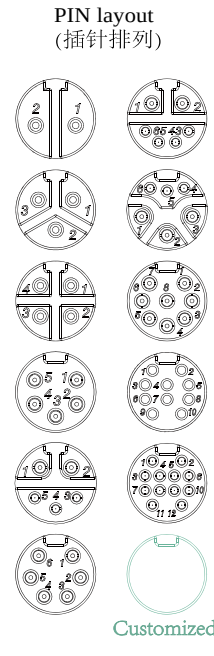

Customized

Plug with male PIN (公针插头)

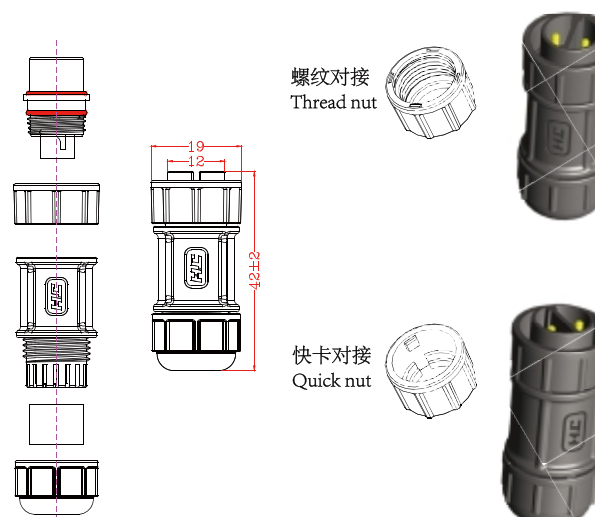


螺纹对接
Thread nut

快卡对接
Quick nut

JH-M16-MDM01

Figure No.(图号)
JH-M16-MDM01-2P-X
JH-M16-MDM01-2S-X
JH-M16-MDM01-3P-X
JH-M16-MDM01-3S-X
JH-M16-MDM01-4P-X
JH-M16-MDM01-2+4P-X
JH-M16-MDM01-8P-X
JH-M16-MDM01-12P-X


PIN layout
(插针排列)

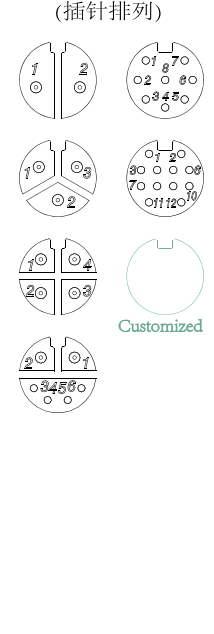

Customized

Simple parameter description:
Rated voltage & current:
2/3/4: 500V DC/AC 15A/8A
A+B: 500V DC/AC 8A+3A
5-12P: 100V DC/AC 8A/3A
Insulation voltage: DC 1KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67 / 68
Operating temperature: -40 ~ 105℃
Assembly cable diameter: 4.5~9.2mm


简要参数描述:
额定电压及电流:
2/3/4: 500V DC/AC 15A/8A
A+B: 500V DC/AC 8A+3A
5-12P: 100V DC/AC 8A/3A
绝缘电压: DC 1KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / 68
工作温度: -40 ~ 105℃
装配电缆直径: 4.5~9.2mm



Mark "S"

JH-16 series


Docking socket with male PIN (公针对接插座)

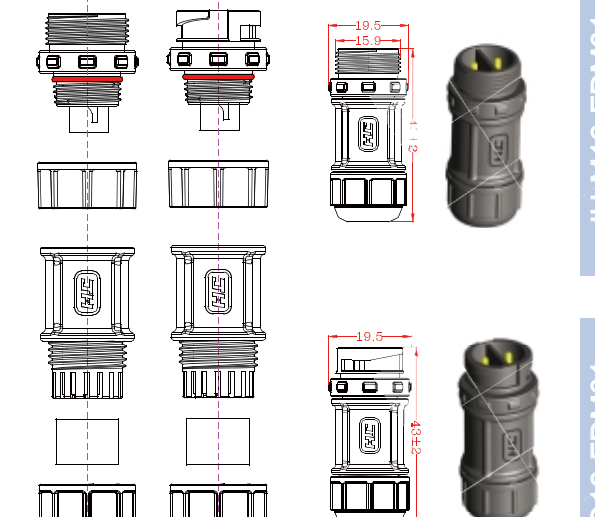

JH-M16-FDM01


Figure No.(图号)
JH-M16-FDM01-2P-X
JH-M16-FDM01-2S-X
JH-M16-FDM01-3P-X
JH-M16-FDM01-3S-X
JH-M16-FDM01-4P-X
JH-M16-FDM01-5P-X
JH-M16-FDM01-2+3P-X
JH-M16-FDM01-6P-X
JH-M16-FDM01-2+4P-X
JH-M16-FDM01-3+3P-X
JH-M16-FDM01-8P-X
JH-M16-FDM01-10P-X
JH-M16-FDM01-12P-X

PIN layout
(插针排列)

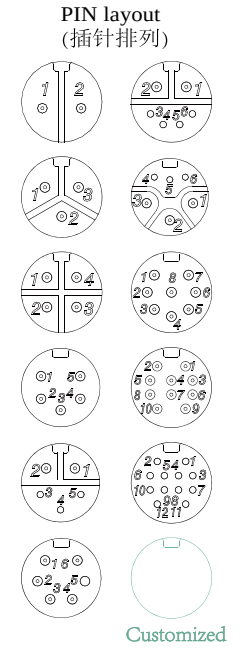

Customized


Docking socket with female PIN (母针对接插座)

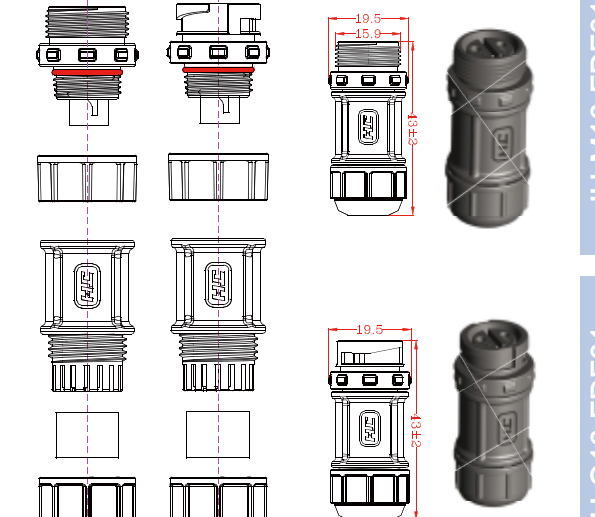

JH-M16-FDF01

Figure No.(图号)
JH-M16-FDF01-2P-X
JH-M16-FDF01-2S-X
JH-M16-FDF01-3P-X
JH-M16-FDF01-3S-X
JH-M16-FDF01-4P-X
JH-M16-FDF01-2+4P-X
JH-M16-FDF01-8P-X
JH-M16-FDF01-12P-X


PIN layout
(插针排列)

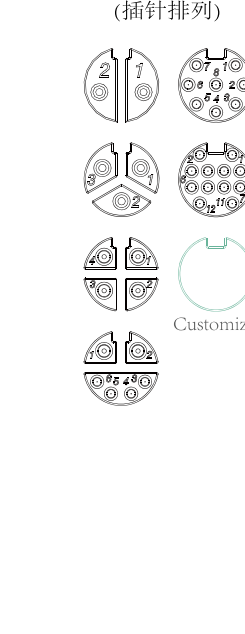

Customized


Simple parameter description:
Rated voltage & current:
2/3/4: 500V DC/AC 15A/8A
A+B: 500V DC/AC 8A+3A
5-12P: 100V DC/AC 8A/3A
Insulation voltage: DC 1KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67 / 68
Operating temperature: -40 ~ 105℃
Assembly cable diameter: 4.5~9.2mm

简要参数描述:
额定电压及电流:
2/3/4: 500V DC/AC 15A/8A
A+B: 500V DC/AC 8A+3A
5-12P: 100V DC/AC 8A/3A
绝缘电压: DC 1KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / 68
工作温度: -40 ~ 105℃
装配电缆直径: 4.5~9.2mm




JH-16 series

Plug with female PIN - Molding (母针插头-成型)



JH-M16-MDF11


Figure No.(图号)
JH-M16-MDF11-2P-X
JH-M16-MDF11-3P-X
JH-M16-MDF11-4P-X
JH-M16-MDF11-5P-X
JH-M16-MDF11-2+3P-X
JH-M16-MDF11-6P-X
JH-M16-MDF11-2+4P-X
JH-M16-MDF11-3+3P-X
JH-M16-MDF11-8P-X
JH-M16-MDF11-10P-X
JH-M16-MDF11-12P-X

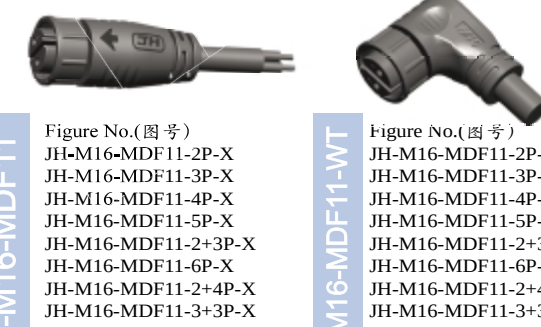

JH-M16-MDF11-WT


Figure No.(图号)
JH-M16-MDF11-2P-WT
JH-M16-MDF11-3P-WT
JH-M16-MDF11-4P-WT
JH-M16-MDF11-5P-WT
JH-M16-MDF11-2+3P-WT
JH-M16-MDF11-6P-WT
JH-M16-MDF11-2+4P-WT
JH-M16-MDF11-3+3P-WT
JH-M16-MDF11-8P-WT
JH-M16-MDF11-10P-WT
JH-M16-MDF11-12P-WT

PIN layout (插针排列)

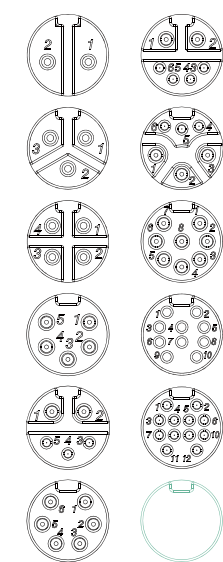


Customized

Plug with male PIN - Molding (公针插头-成型)



JH-M16-MDM11


Figure No.(图号)
JH-M16-MDM11-2P-X
JH-M16-MDM11-3P-X
JH-M16-MDM11-4P-X
JH-M16-MDM11-2+4P-X
JH-M16-MDM11-8P-X
JH-M16-MDM11-12P-X

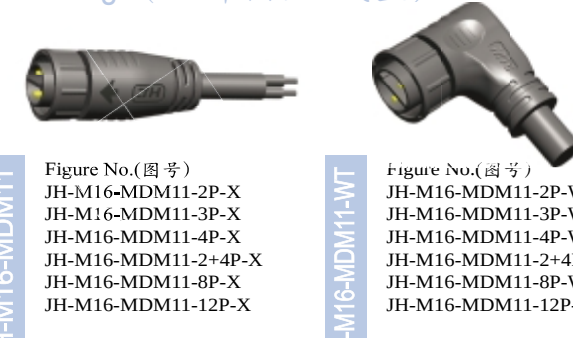

JH-M16-MDM11-WT

Figure No.(图号)
JH-M16-MDM11-2P-WT
JH-M16-MDM11-3P-WT
JH-M16-MDM11-4P-WT
JH-M16-MDM11-2+4P-WT
JH-M16-MDM11-8P-WT
JH-M16-MDM11-12P-WT

PIN layout (插针排列)

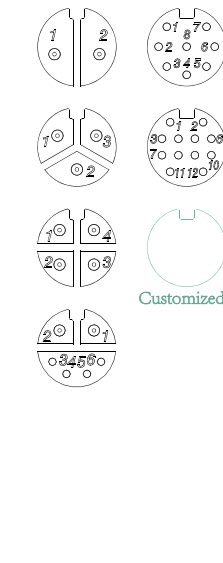

Customized

Simple parameter description:

Rated voltage & current:

2/3/4: 500V DC/AC 15A/8A

A+B: 500V DC/AC 8A+3A

5-12P: 100V DC/AC 8A/3A

Insulation voltage: DC 1KV 2mA 60s

Insulation resistance: DC 500V 200MΩ

IP-Code: IP66 / 67

Operating temperature: -40 ~105℃

Molding cable diameter: 3~12mm

简要参数描述:

额定电压及电流:

2/3/4: 500V DC/AC 15A/8A

A+B: 500V DC/AC 8A+3A

5-12P: 100V DC/AC 8A/3A

绝缘电压: DC 1KV 2mA 60s

绝缘电阻: DC 500V 200MΩ

IP防护等级: IP66 / 67


工作温度: -40 ~105℃

注塑电缆直径: 3~12mm

P24


JH-16 series

Docking socket with male PIN - Molding (公针对接插座-成型)



JH-M16-FDM11


Figure No.(图号)
JH-M16-FDM11-2P-X
JH-M16-FDM11-3P-X
JH-M16-FDM11-4P-X
JH-M16-FDM11-5P-X
JH-M16-FDM11-2+3P-X
JH-M16-FDM11-6P-X
JH-M16-FDM11-2+4P-X
JH-M16-FDM11-3+3P-X
JH-M16-FDM11-8P-X
JH-M16-FDM11-10P-X
JH-M16-FDM11-12P-X

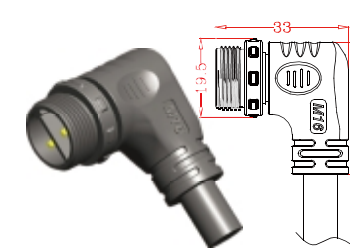

JH-M16-FDM11-WT


Figure No.(图号)
JH-M16-FDM11-2P-WT
JH-M16-FDM11-3P-WT
JH-M16-FDM11-4P-WT
JH-M16-FDM11-5P-WT
JH-M16-FDM11-2+3P-WT
JH-M16-FDM11-6P-WT
JH-M16-FDM11-2+4P-WT
JH-M16-FDM11-3+3P-WT
JH-M16-FDM11-8P-WT
JH-M16-FDM11-10P-WT
JH-M16-FDM11-12P-WT

PIN layout (插针排列)




Customized

Docking socket with female PIN - Molding (母针对接插座-成型)



JH-M16-FDF11


Figure No.(图号)
JH-M16-FDF11-2P-X
JH-M16-FDF11-3P-X
JH-M16-FDF11-4P-X
JH-M16-FDF11-2+4P-X
JH-M16-FDF11-8P-X
JH-M16-FDF11-12P-X

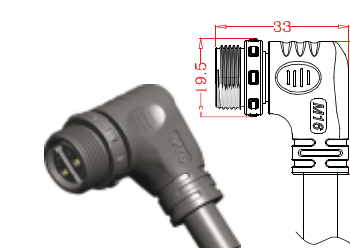

JH-M16-FDF11-WT

Figure No.(图号)
JH-M16-FDF11-2P-WT
JH-M16-FDF11-3P-WT
JH-M16-FDF11-4P-WT
JH-M16-FDF11-2+4P-WT
JH-M16-FDF11-8P-WT
JH-M16-FDF11-12P-WT

PIN layout (插针排列)



Customized

Simple parameter description:

Rated voltage & current:

2/3/4: 500V DC/AC 15A/8A

A+B: 500V DC/AC 8A+3A

5-12P: 100V DC/AC 8A/3A

Insulation voltage: DC 1KV 2mA 60s

Insulation resistance: DC 500V 200MΩ

IP-Code: IP66 / 67

Operating temperature: -40 ~105℃

Molding cable diameter: 3~12mm

简要参数描述:

额定电压及电流:

2/3/4: 500V DC/AC 15A/8A

A+B: 500V DC/AC 8A+3A

5-12P: 100V DC/AC 8A/3A

绝缘电压: DC 1KV 2mA 60s

绝缘电阻: DC 500V 200MΩ

IP防护等级: IP66 / 67

工作温度: -40 ~105℃

注塑电缆直径: 3~12mm

P25


JH-16 series

Front panel socket (前装面板插座)


JH-M16-FFM01




Figure No.(图号)
JH-M16-FFM01-2P-X
JH-M16-FFM01-2S-X
JH-M16-FFM01-3P-X
JH-M16-FFM01-3S-X
JH-M16-FFM01-4P-X
JH-M16-FFM01-5P-X
JH-M16-FFM01-2+3P-X
JH-M16-FFM01-6P-X
JH-M16-FFM01-2+4P-X
JH-M16-FFM01-3+3P-X
JH-M16-FFM01-8P-X
JH-M16-FFM01-10P-X
JH-M16-FFM01-12P-X



Regular style
常规款式
Mark: 01



Extended style
加长款式
Mark: 02




Panel cutout

JH-M16-FFF01



Figure No.(图号)
JH-M16-FFF01-2P-X
JH-M16-FFF01-2S-X
JH-M16-FFF01-3P-X
JH-M16-FFF01-3S-X
JH-M16-FFF01-4P-X
JH-M16-FFF01-2+4P-X
JH-M16-FFF01-8P-X
JH-M16-FFF01-12P-X



Installation method




JH-Q16-FFM01




Figure No.(图号)
JH-Q16-FFM01-2P-X
JH-Q16-FFM01-2S-X
JH-Q16-FFM01-3P-X
JH-Q16-FFM01-3S-X
JH-Q16-FFM01-4P-X
JH-Q16-FFM01-5P-X
JH-Q16-FFM01-2+3P-X
JH-Q16-FFM01-6P-X
JH-Q16-FFM01-2+4P-X
JH-Q16-FFM01-3+3P-X
JH-Q16-FFM01-8P-X
JH-Q16-FFM01-10P-X
JH-Q16-FFM01-12P-X



Panel cutout



Installation method



Simple parameter description:

Rated voltage & current:
2/3/4: 500V DC/AC 15A/8A
A+B: 500V DC/AC 8A+3A
5-12P: 100V DC/AC 8A/3A
Insulation voltage: DC 1KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67 / 68
Operating temperature: -40 ~105℃

简要参数描述:

额定电压及电流:
2/3/4: 500V DC/AC 15A/8A
A+B: 500V DC/AC 8A+3A
5-12P: 100V DC/AC 8A/3A
绝缘电压: DC 1KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / 68
工作温度: -40 ~105℃


JH-16 series

Rear panel socket (后装面板插座)


JH-M16-FRM01



Figure No.(图号)
JH-M16-FRM01-2P-X
JH-M16-FRM01-2S-X
JH-M16-FRM01-3P-X
JH-M16-FRM01-3S-X
JH-M16-FRM01-4P-X
JH-M16-FRM01-5P-X
JH-M16-FRM01-2+3P-X
JH-M16-FRM01-6P-X
JH-M16-FRM01-2+4P-X
JH-M16-FRM01-3+3P-X
JH-M16-FRM01-8P-X
JH-M16-FRM01-10P-X
JH-M16-FRM01-12P-X



Panel cutout



Installation method





Figure No.(图号)
JH-M16-FRF01-2P-X
JH-M16-FRF01-2S-X
JH-M16-FRF01-3P-X
JH-M16-FRF01-3S-X
JH-M16-FRF01-4P-X
JH-M16-FRF01-2+4P-X
JH-M16-FRF01-8P-X
JH-M16-FRF01-12P-X


JH-Q16-FRM01



Figure No.(图号)
JH-Q16-FRM01-2P-X
JH-Q16-FRM01-2S-X
JH-Q16-FRM01-3P-X
JH-Q16-FRM01-3S-X
JH-Q16-FRM01-4P-X
JH-Q16-FRM01-5P-X
JH-Q16-FRM01-2+3P-X
JH-Q16-FRM01-6P-X
JH-Q16-FRM01-2+4P-X
JH-Q16-FRM01-3+3P-X
JH-Q16-FRM01-8P-X
JH-Q16-FRM01-10P-X
JH-Q16-FRM01-12P-X



Panel cutout



Installation method




Figure No.(图号)
JH-Q16-FRF01-2P-X
JH-Q16-FRF01-2S-X
JH-Q16-FRF01-3P-X
JH-Q16-FRF01-3S-X
JH-Q16-FRF01-4P-X
JH-Q16-FRF01-2+4P-X
JH-Q16-FRF01-8P-X
JH-Q16-FRF01-12P-X

Simple parameter description:


Rated voltage & current:
2/3/4: 500V DC/AC 15A/8A
A+B: 500V DC/AC 8A+3A
5-12P: 100V DC/AC 8A/3A
Insulation voltage: DC 1KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67 / 68
Operating temperature: -40 ~105℃

简要参数描述:

额定电压及电流:
2/3/4: 500V DC/AC 15A/8A
A+B: 500V DC/AC 8A+3A
5-12P: 100V DC/AC 8A/3A
绝缘电压: DC 1KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / 68
工作温度: -40 ~105℃

JH-16 series

Flange panel socket (法兰面板插座)

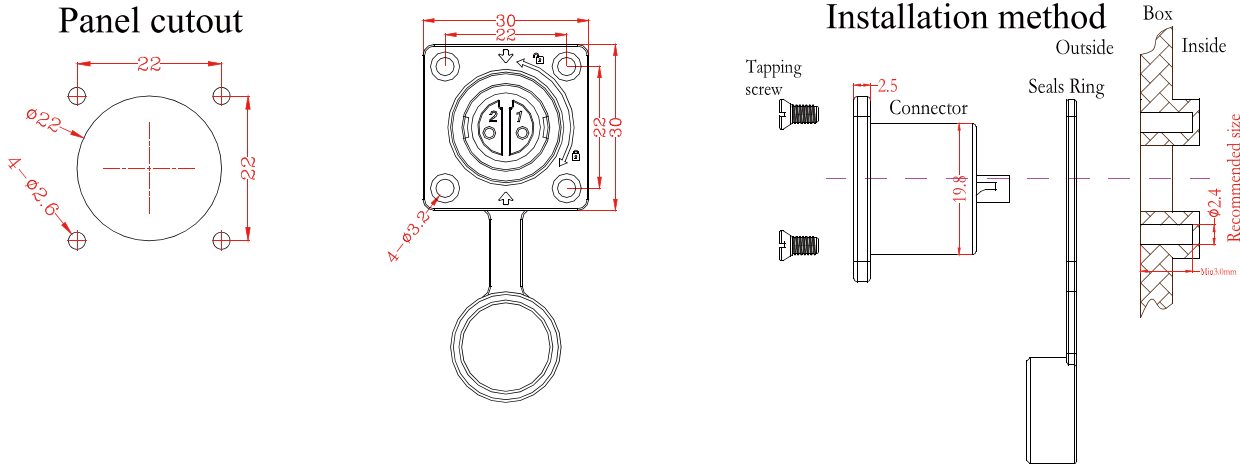


Flange socket with male PIN (公针法兰插座)



JH-F16-FRM02

Figure No.(图号)

JH-F16-FRM02-2P-X
JH-F16-FRM02-2S-X
JH-F16-FRM02-3P-X
JH-F16-FRM02-3S-X
JH-F16-FRM02-4P-X
JH-F16-FRM02-5P-X
JH-F16-FRM02-2+3P-X
JH-F16-FRM02-6P-X
JH-F16-FRM02-2+4P-X
JH-F16-FRM02-3+3P-X
JH-F16-FRM02-8P-X
JH-F16-FRM02-10P-X
JH-F16-FRM02-12P-X

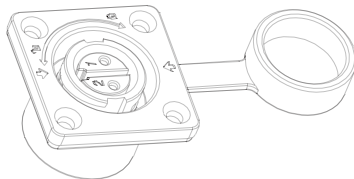

Simple parameter description:

Rated voltage & current:

2/3/4: 500V DC/AC 15A/8A

A+B: 500V DC/AC 8A+3A

5-12P: 100V DC/AC 8A/3A

Insulation voltage: DC 1KV 2mA 60s

Insulation resistance: DC 500V 200MΩ

IP-Code: IP67 / 68

Operating temperature: -40 ~ 105°C

简要参数描述:

额定电压及电流:

2/3/4: 500V DC/AC 15A/8A

A+B: 500V DC/AC 8A+3A

5-12P: 100V DC/AC 8A/3A

绝缘电压: DC 1KV 2mA 60s

绝缘电阻: DC 500V 200MΩ

IP防护等级: IP67 / 68

工作温度: -40 ~ 105°C

Flange socket with female PIN (母针法兰插座)



JH-F16-FRF02

Figure No.(图号)

JH-F16-FRF02-2P-X
JH-F16-FRF02-2S-X
JH-F16-FRF02-3P-X
JH-F16-FRF02-3S-X
JH-F16-FRF02-4P-X
JH-F16-FRF02-2+4P-X
JH-F16-FRF02-8P-X
JH-F16-FRF02-12P-X

JH-16 series

Extended products (延伸产品)

Figure No.(图号)

JH-M16-MDF12-2(.....)P
JH-Q16-MDF12-2(.....)P
JH-M16-MDM12-2(.....)P
JH-Q16-MDM12-2(.....)P
JH-M16-FDM12-2(.....)P
JH-Q16-FDM12-2(.....)P
JH-M16-FDF12-2(.....)P
JH-Q16-FDF12-2(.....)P





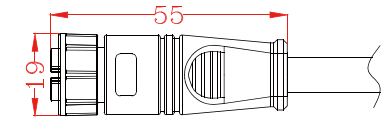


Figure No.(图号)

JH-M16-1F2-2/3 P
JH-M16-1F3-2/3 P
JH-M16-1F4-2/3 P
JH-M16-1F5-2/3 P

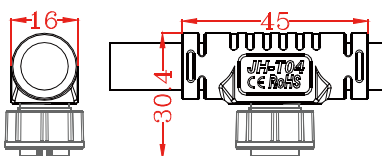
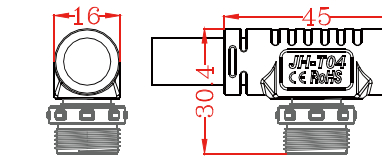


Figure No.(图号)

Male PIN(公针): JH-M16T04F-M
Female PIN(母针): JH-M16T04F-F

Figure No.(图号)

Male PIN(公针): JH-M16T04M-M
Female PIN(母针): JH-M16T04M-F

Figure No.(图号)

Male PIN(公针): JH-Q16T04F-M
Female PIN(母针): JH-Q16T04F-F

Figure No.(图号)

Male PIN(公针): JH-Q16T04M-M
Female PIN(母针): JH-Q16T04M-F

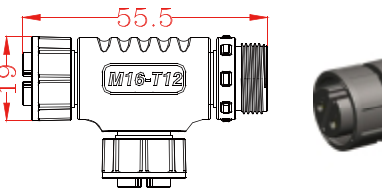


Figure No.(图号)

JH-M16-T12-XXX

JH-16 series

Waterproof cover (防水盖)

JH-M16-FDC01


JH-Q16-FDC01

JH-M16-MDC01


JH-Q16-MDC01




Schematic diagram of usage
安装示意图




Schematic diagram of usage
安装示意图



Schematic diagram of usage
安装示意图





Schematic diagram of usage
安装示意图



JH-M16-FRC01





Schematic diagram of usage
安装示意图

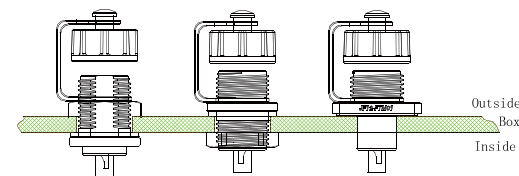

JH-Q16-FRC01



Schematic diagram of usage
安装示意图

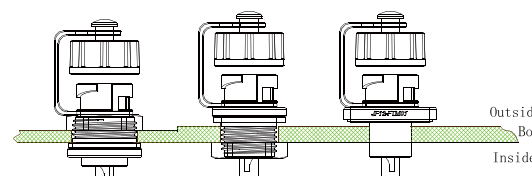


P30

Plug(插头端)


Different series for your choice:
1: Male PIN or female pin;
2: Thread docking or quick docking.

可选择不同系列
1: 公针或母针;
2: 螺纹对接或快卡对接。

螺纹对接
Thread nut



快卡对接
Quick nut



Socket (插座端)

Different series for your choice:
1: Male PIN or female pin;
2: Thread docking or quick docking;
3: Front panel or rear panel or flange.

可选择不同系列
1: 公针或母针;
2: 螺纹对接或快卡对接;
3: 前装面板或后装面板或法兰安装。




深圳市嘉辉实业有限公司
东莞市嘉辉智能科技有限公司
[Http://www.jhplug.com](http://www.jhplug.com) [Http://www.jhsocket.com](http://www.jhsocket.com)

JH-20 Series

P31

JH-20 series

Plug with female PIN (母针插头)

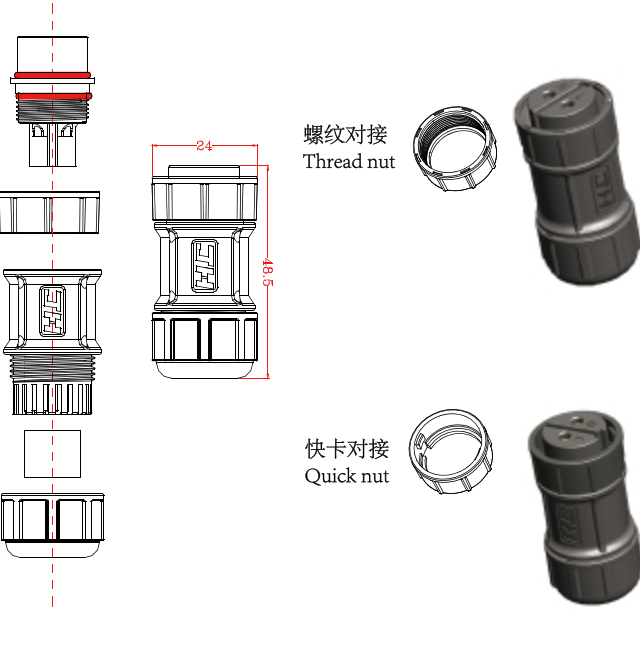


JH-M20-MDF01

Figure No.(图号)
JH-M20-MDF01-2P-X
JH-M20-MDF01-2S-X
JH-M20-MDF01-3P-X
JH-M20-MDF01-3S-X
JH-M20-MDF01-4P-X
JH-M20-MDF01-2+2P-X
JH-M20-MDF01-5P-X
JH-M20-MDF01-2+3P-X
JH-M20-MDF01-7P-X


JH-Q20-MDF01

Figure No.(图号)
JH-Q20-MDF01-2P-X
JH-Q20-MDF01-2S-X
JH-Q20-MDF01-3P-X
JH-Q20-MDF01-3S-X
JH-Q20-MDF01-4P-X
JH-Q20-MDF01-2+2P-X
JH-Q20-MDF01-5P-X
JH-Q20-MDF01-2+3P-X
JH-Q20-MDF01-7P-X

PIN layout
(插针排列)



Plug with male PIN (公针插头)

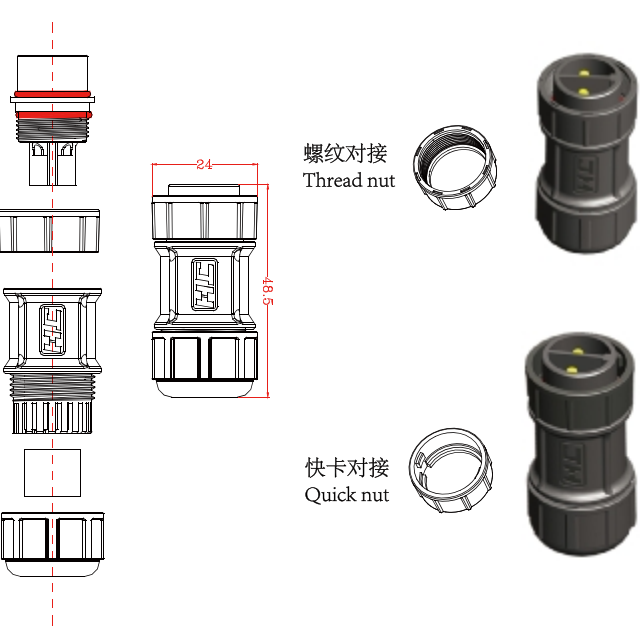


JH-M20-MDM01

Figure No.(图号)
JH-M20-MDM01-2P-X
JH-M20-MDM01-2S-X
JH-M20-MDM01-3P-X
JH-M20-MDM01-3S-X
JH-M20-MDM01-4P-X
JH-M20-MDM01-2+2P-X

JH-Q20-MDM01


Figure No.(图号)
JH-Q20-MDM01-2P-X
JH-Q20-MDM01-2S-X
JH-Q20-MDM01-3P-X
JH-Q20-MDM01-3S-X
JH-Q20-MDM01-4P-X
JH-Q20-MDM01-2+2P-X

PIN layout
(插针排列)



Simple parameter description:
Rated voltage & current:
2/3/4: 500V DC/AC 25A
2+3: 500V DC/AC 25A+8A
5/7P: 300V DC/AC 20A
Insulation voltage: DC 3KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67 / 68
Operating temperature: -40 ~105℃
Assembly cable diameter: 6~11mm


简要参数描述:
额定电压及电流:
2/3/4: 500V DC/AC 25A
2+3: 500V DC/AC 25A+8A
5/7P: 300V DC/AC 20A
绝缘电压: DC 3KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / 68
工作温度: -40 ~105℃
装配电缆直径: 6~11mm



Mark "S"

JH-20 series

Docking socket with male PIN (公针对接插座)

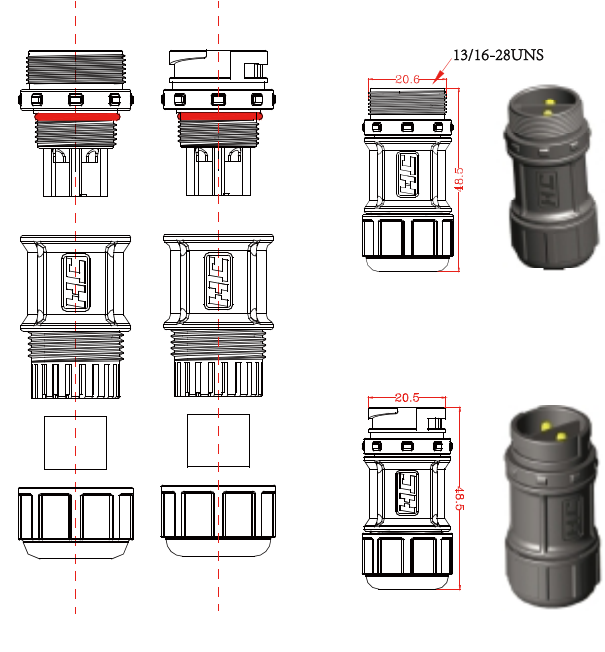


JH-M20-FDM01

Figure No.(图号)
JH-M20-FDM01-2P-X
JH-M20-FDM01-2S-X
JH-M20-FDM01-3P-X
JH-M20-FDM01-3S-X
JH-M20-FDM01-4P-X
JH-M20-FDM01-2+2P-X
JH-M20-FDM01-5P-X
JH-M20-FDM01-2+3P-X
JH-M20-FDM01-7P-X


JH-Q20-FDM01

Figure No.(图号)
JH-Q20-FDM01-2P-X
JH-Q20-FDM01-2S-X
JH-Q20-FDM01-3P-X
JH-Q20-FDM01-3S-X
JH-Q20-FDM01-4P-X
JH-Q20-FDM01-2+2P-X
JH-Q20-FDM01-5P-X
JH-Q20-FDM01-2+3P-X
JH-Q20-FDM01-7P-X

PIN layout
(插针排列)



Docking socket with female PIN (母针对接插座)

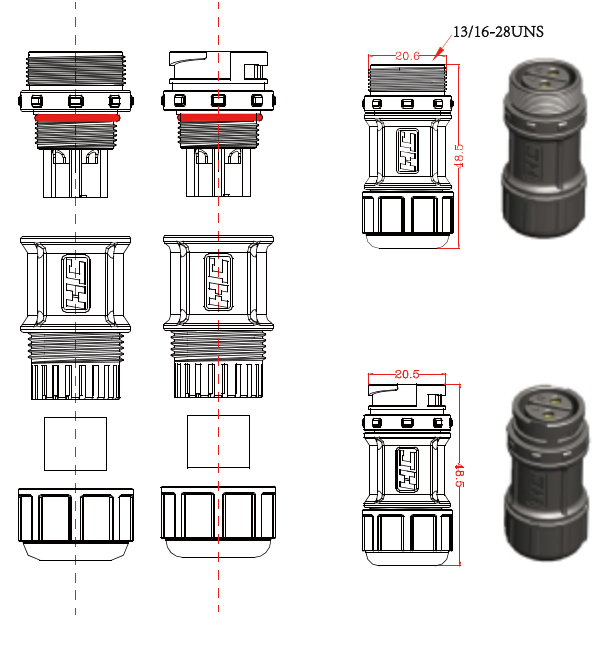


JH-M20-FDF01

Figure No.(图号)
JH-M20-FDF01-2P-X
JH-M20-FDF01-2S-X
JH-M20-FDF01-3P-X
JH-M20-FDF01-3S-X
JH-M20-FDF01-4P-X
JH-M20-FDF01-2+2P-X

JH-Q20-FDF01


Figure No.(图号)
JH-Q20-FDF01-2P-X
JH-Q20-FDF01-2S-X
JH-Q20-FDF01-3P-X
JH-Q20-FDF01-3S-X
JH-Q20-FDF01-4P-X
JH-Q20-FDF01-2+2P-X

PIN layout
(插针排列)



Simple parameter description:
Rated voltage & current:
2/3/4: 500V DC/AC 25A
2+3: 500V DC/AC 25A+8A
5/7P: 300V DC/AC 20A
Insulation voltage: DC 3KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67 / 68
Operating temperature: -40 ~105℃
Assembly cable diameter: 6~11mm


简要参数描述:
额定电压及电流:
2/3/4: 500V DC/AC 25A
2+3: 500V DC/AC 25A+8A
5/7P: 300V DC/AC 20A
绝缘电压: DC 3KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / 68
工作温度: -40 ~105℃
装配电缆直径: 6~11mm



Mark "S"

JH-20 series

Plug with female PIN - Molding (母针插头-成型)

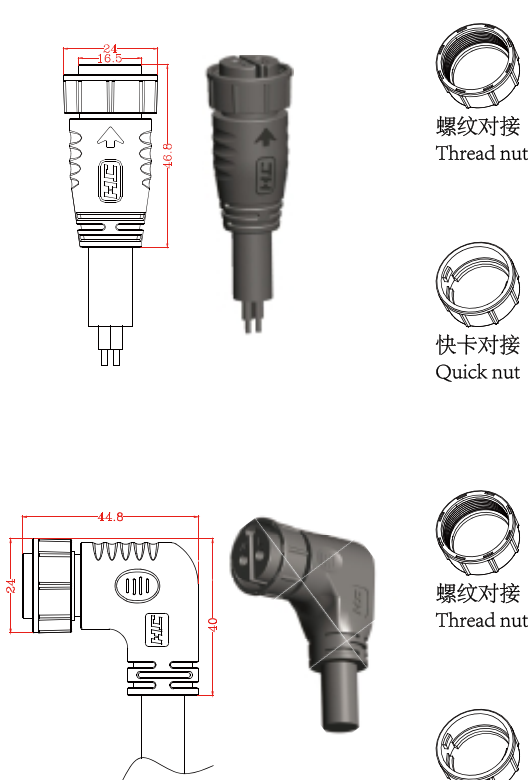

螺纹对接
Thread nut

快卡对接
Quick nut

螺纹对接
Thread nut

快卡对接
Quick nut

JH-M20-MDF11

Figure No.(图号)
JH-M20-MDF11-2P-X
JH-M20-MDF11-3P-X
JH-M20-MDF11-4P-X
JH-M20-MDF11-2+2P-X
JH-M20-MDF11-5P-X
JH-M20-MDF11-2+3P-X
JH-M20-MDF11-7P-X

JH-Q20-MDF11

Figure No.(图号)
JH-Q20-MDF11-2P-X
JH-Q20-MDF11-3P-X
JH-Q20-MDF11-4P-X
JH-Q20-MDF11-2+2P-X
JH-Q20-MDF11-5P-X
JH-Q20-MDF11-2+3P-X
JH-Q20-MDF11-7P-X


JH-M20-MDF11-WT

Figure No.(图号)
JH-M20-MDF11-2P-WT
JH-M20-MDF11-3P-WT
JH-M20-MDF11-4P-WT
JH-M20-MDF11-2+2P-WT
JH-M20-MDF11-5P-WT
JH-M20-MDF11-2+3P-WT
JH-M20-MDF11-7P-WT

JH-Q20-MDF11-WT


Figure No.(图号)
JH-Q20-MDF11-2P-WT
JH-Q20-MDF11-3P-WT
JH-Q20-MDF11-4P-WT
JH-Q20-MDF11-2+2P-WT
JH-Q20-MDF11-5P-WT
JH-Q20-MDF11-2+3P-T
JH-Q20-MDF11-7P-WT

PIN layout
(插针排列)



Simple parameter description:
Rated voltage & current:
2/3/4: 500V DC/AC 25A
2+3: 500V DC/AC 25A+8A
5/7P: 300V DC/AC 20A
Insulation voltage: DC 3kV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67 / 68
Operating temperature: -40 ~ 105°C
Molding cable diameter: 3~12mm

Plug with male PIN - Molding (公针插头-成型)

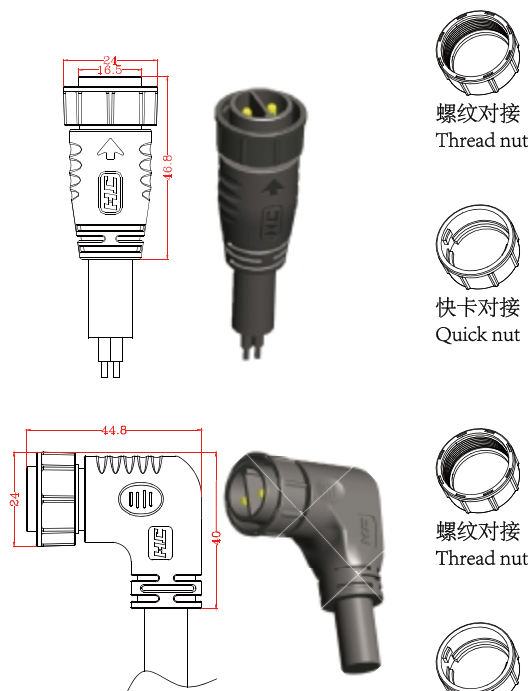

螺纹对接
Thread nut

快卡对接
Quick nut

螺纹对接
Thread nut

快卡对接
Quick nut

JH-M20-MDM11

Figure No.(图号)
JH-M20-MDM11-2P-X
JH-M20-MDM11-3P-X
JH-M20-MDM11-4P-X
JH-M20-MDM11-2+2P-X

JH-Q20-MDM11

Figure No.(图号)
JH-Q20-MDM11-2P-X
JH-Q20-MDM11-3P-X
JH-Q20-MDM11-4P-X
JH-Q20-MDM11-2+2P-X


JH-M20-MDM11-WT

Figure No.(图号)
JH-M20-MDM11-2P-WT
JH-M20-MDM11-3P-WT
JH-M20-MDM11-4P-WT
JH-M20-MDM11-2+2P-WT

JH-Q20-MDM11-WT

Figure No.(图号)
JH-Q20-MDM11-2P-WT
JH-Q20-MDM11-3P-WT
JH-Q20-MDM11-4P-WT
JH-Q20-MDM11-2+2P-WT

PIN layout
(插针排列)




简要参数描述:
额定电压及电流:
2/3/4: 500V DC/AC 25A
2+3: 500V DC/AC 25A+8A
5/7P: 300V DC/AC 20A
绝缘电压: DC 3kV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / 68
工作温度: -40 ~ 105°C
注塑电缆直径: 3~12mm

P34

JH-20 series

Docking socket with male PIN - Molding (公针对接插座-成型)

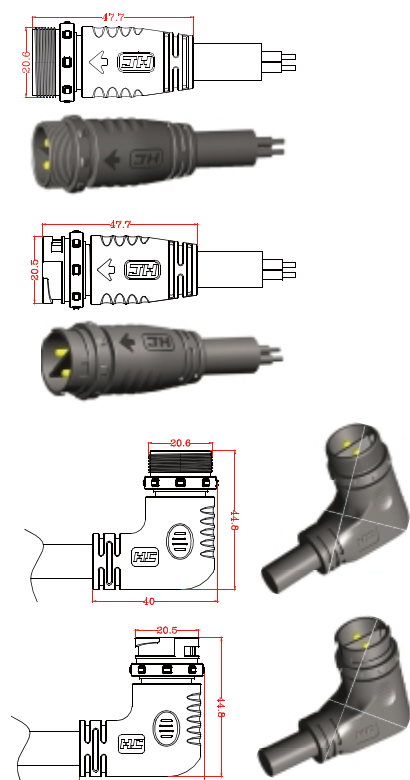

JH-M20-FDM11

Figure No.(图号)
JH-M20-FDM11-2P-X
JH-M20-FDM11-3P-X
JH-M20-FDM11-4P-X
JH-M20-FDM11-2+2P-X
JH-M20-FDM11-5P-X
JH-M20-FDM11-2+3P-X
JH-M20-FDM11-7P-X

JH-Q20-FDM11

Figure No.(图号)
JH-Q20-FDM11-2P-X
JH-Q20-FDM11-3P-X
JH-Q20-FDM11-4P-X
JH-Q20-FDM11-2+2P-X
JH-Q20-FDM11-5P-X
JH-Q20-FDM11-2+3P-X
JH-Q20-FDM11-7P-X


JH-M20-FDM11-WT

Figure No.(图号)
JH-M20-FDM11-2P-WT
JH-M20-FDM11-3P-WT
JH-M20-FDM11-4P-WT
JH-M20-FDM11-2+2P-WT
JH-M20-FDM11-5P-WT
JH-M20-FDM11-2+3P-WT
JH-M20-FDM11-7P-WT

JH-Q20-FDM11-WT


Figure No.(图号)
JH-Q20-FDM11-2P-WT
JH-Q20-FDM11-3P-WT
JH-Q20-FDM11-4P-WT
JH-Q20-FDM11-2+2P-WT
JH-Q20-FDM11-5P-WT
JH-Q20-FDM11-2+3P-WT
JH-Q20-FDM11-7P-WT

PIN layout
(插针排列)



Simple parameter description:
Rated voltage & current:
2/3/4: 500V DC/AC 25A
2+3: 500V DC/AC 25A+8A
5/7P: 300V DC/AC 20A
Insulation voltage: DC 3kV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67 / 68
Operating temperature: -40 ~ 105°C
Molding cable diameter: 3~12mm

Docking socket with female PIN - Molding (母针对接插座-成型)

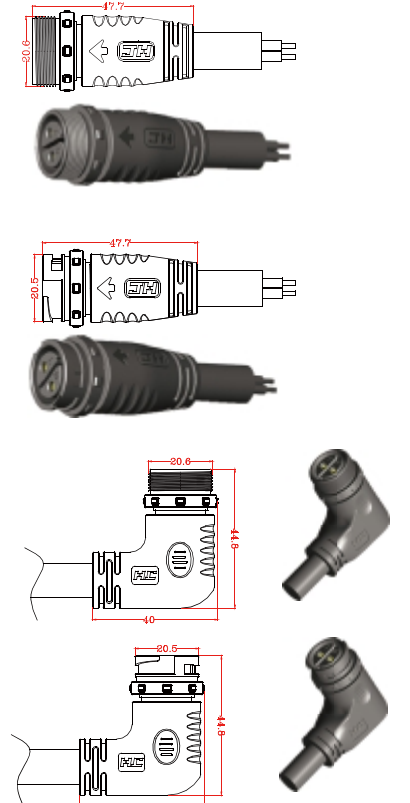

JH-M20-FDF11

Figure No.(图号)
JH-M20-FDF11-2P-X
JH-M20-FDF11-3P-X
JH-M20-FDF11-4P-X
JH-M20-FDF11-2+2P-X

JH-Q20-FDF11

Figure No.(图号)
JH-Q20-FDF11-2P-X
JH-Q20-FDF11-3P-X
JH-Q20-FDF11-4P-X
JH-Q20-FDF11-2+2P-X


JH-M20-FDF11-WT

Figure No.(图号)
JH-M20-FDF11-2P-WT
JH-M20-FDF11-3P-WT
JH-M20-FDF11-4P-WT
JH-M20-FDF11-2+2P-WT

JH-Q20-FDF11-WT

Figure No.(图号)
JH-Q20-FDF11-2P-WT
JH-Q20-FDF11-3P-WT
JH-Q20-FDF11-4P-WT
JH-Q20-FDF11-2+2P-WT

PIN layout
(插针排列)




简要参数描述:
额定电压及电流:
2/3/4: 500V DC/AC 25A
2+3: 500V DC/AC 25A+8A
5/7P: 300V DC/AC 20A
绝缘电压: DC 3kV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / 68
工作温度: -40 ~ 105°C
注塑电缆直径: 3~12mm



P35

JH-20 series

Front panel socket (前装面板插座)



Panel cutout



JH-M20-FFM01


Figure No.(图号)
JH-M20-FFM01-2P-X
JH-M20-FFM01-2S-X
JH-M20-FFM01-3P-X
JH-M20-FFM01-3S-X
JH-M20-FFM01-4P-X
JH-M20-FFM01-2+2P-X
JH-M20-FFM01-5P-X
JH-M20-FFM01-2+3P-X
JH-M20-FFM01-7P-X





JH-M20-FFF01

Figure No.(图号)
JH-M20-FFF01-2P-X
JH-M20-FFF01-2S-X
JH-M20-FFF01-3P-X
JH-M20-FFF01-3S-X
JH-M20-FFF01-4P-X
JH-M20-FFF01-2+2P-X

Rear panel socket (后装面板插座)



Panel cutout



JH-Q20-FRM01

Figure No.(图号)
JH-Q20-FRM01-2P-X
JH-Q20-FRM01-2S-X
JH-Q20-FRM01-3P-X
JH-Q20-FRM01-3S-X
JH-Q20-FRM01-4P-X
JH-Q20-FRM01-2+2P-X
JH-Q20-FRM01-5P-X
JH-Q20-FRM01-2+3P-X
JH-Q20-FRM01-7P-X



JH-M20-FRF01

Figure No.(图号)
JH-Q20-FRF01-2P-X
JH-Q20-FRF01-2S-X
JH-Q20-FRF01-3P-X
JH-Q20-FRF01-3S-X
JH-Q20-FRF01-4P-X
JH-Q20-FRF01-2+2P-X

Simple parameter description:

Rated voltage & current:

2/3/4: 500V DC/AC 25A
2+3: 500V DC/AC 25A+8A
5/7P: 300V DC/AC 20A

Insulation voltage: DC 3KV 2mA 60s

Insulation resistance: DC 500V 200MΩ

IP-Code: IP67 / 68

Operating temperature: -40 ~105°C

简要参数描述:

额定电压及电流:


2/3/4: 500V DC/AC 25A
2+3: 500V DC/AC 25A+8A
5/7P: 300V DC/AC 20A

绝缘电压: DC 3KV 2mA 60s

绝缘电阻: DC 500V 200MΩ

IP防护等级: IP67 / 68

工作温度: -40 ~105°C





Mark "S"

P36


JH-20 series

Flange panel socket (法兰面板插座)

Panel cutout

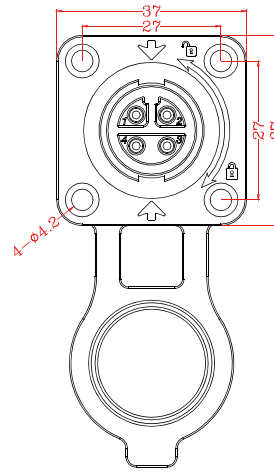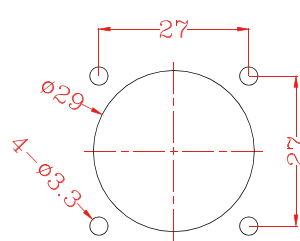

Installation method

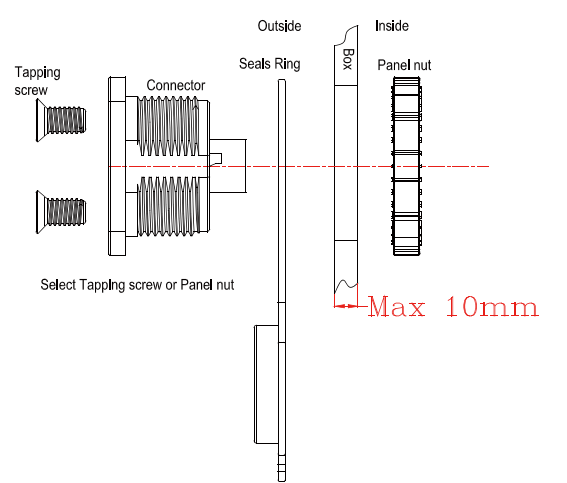


Flange socket with male PIN (公针法兰插座)



JH-F20-FFM01

Figure No.(图号)
JH-F20-FFM01-2P-X
JH-F20-FFM01-2S-X
JH-F20-FFM01-3P-X
JH-F20-FFM01-3S-X
JH-F20-FFM01-4P-X
JH-F20-FFM01-2+2P-X
JH-F20-FFM01-5P-X
JH-F20-FFM01-2+3P-X
JH-F20-FFM01-7P-X

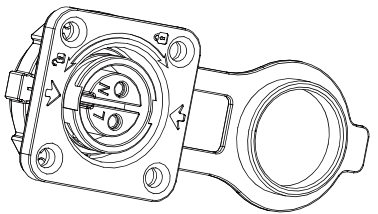

JH-F20-FFF01

Figure No.(图号)
JH-F20-FFF01-2P-X
JH-F20-FFF01-2S-X
JH-F20-FFF01-3P-X
JH-F20-FFF01-3S-X
JH-F20-FFF01-4P-X
JH-F20-FFF01-2+2P-X

Flange socket with female PIN (母针法兰插座)



Simple parameter description:

Rated voltage & current:

2/3/4: 500V DC/AC 25A
2+3: 500V DC/AC 25A+8A
5/7P: 300V DC/AC 20A

Insulation voltage: DC 3KV 2mA 60s

Insulation resistance: DC 500V 200MΩ

IP-Code: IP67 / 68

Operating temperature: -40 ~105°C

简要参数描述:

额定电压及电流:

2/3/4: 500V DC/AC 25A
2+3: 500V DC/AC 25A+8A
5/7P: 300V DC/AC 20A

绝缘电压: DC 3KV 2mA 60s

绝缘电阻: DC 500V 200MΩ


IP防护等级: IP67 / 68

工作温度: -40 ~105°C

P37

JH-20 series

JH-M20-FSC01 (防水盖)

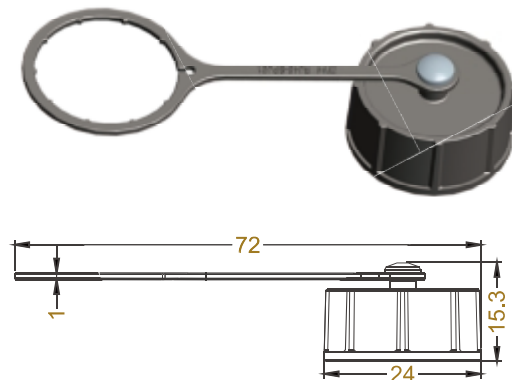


NOTES

1. Operating temperature: -40 to 105°C
2. Protection degree (IP-Code) : IP67
3. RoHS、UL94V-0、
Anti-UV (UV-function)
4. Operating cycles: 3000

Figure No.(图号)
JH-RJ45-FSC01

Installation method

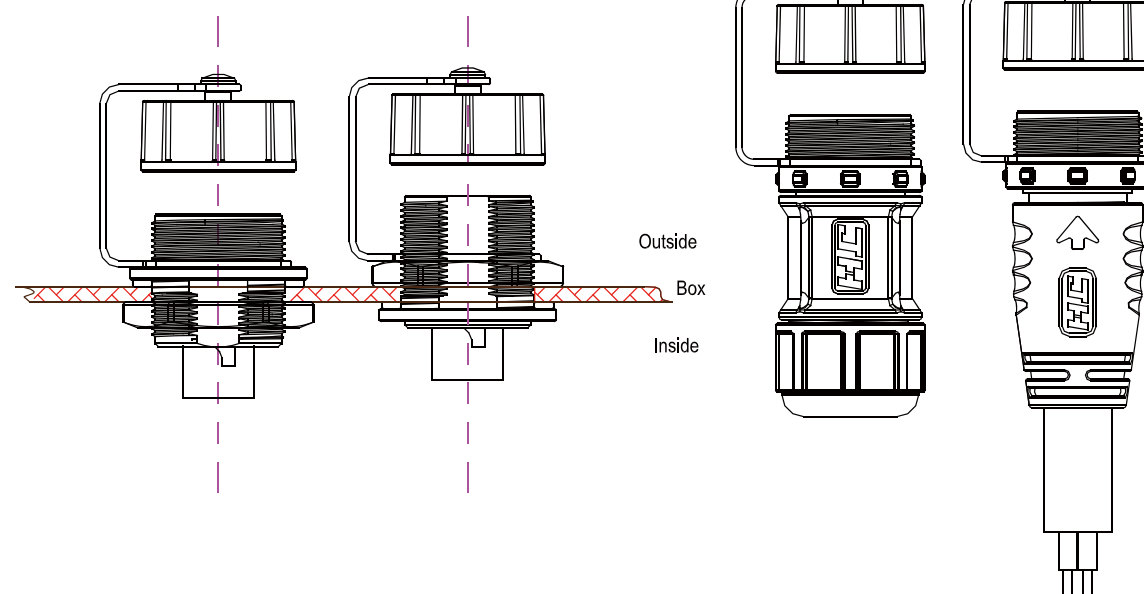


P38



Application scenario
应用场景

P39

JH-M24 series

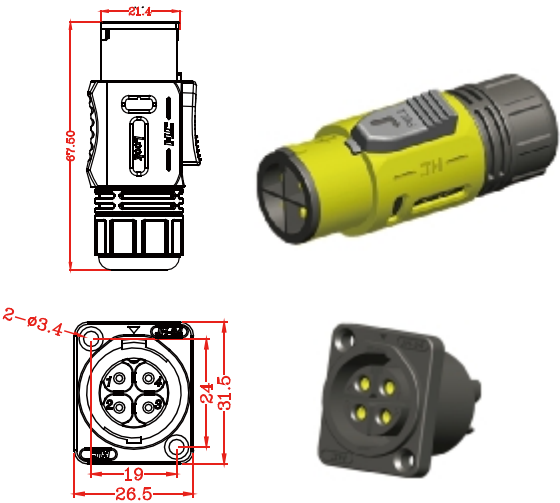


JH-M24-MDM01

Figure No.(图号)
JH-M24-MDM01-2P
JH-M24-MDM01-3P
JH-M24-MDM01-4P
JH-M24-MDM01-8P

JH-M24-FQF01

Figure No.(图号)
JH-M24-FQF01-2P
JH-M24-FQF01-3P
JH-M24-FQF01-4P
JH-M24-FQF01-8P

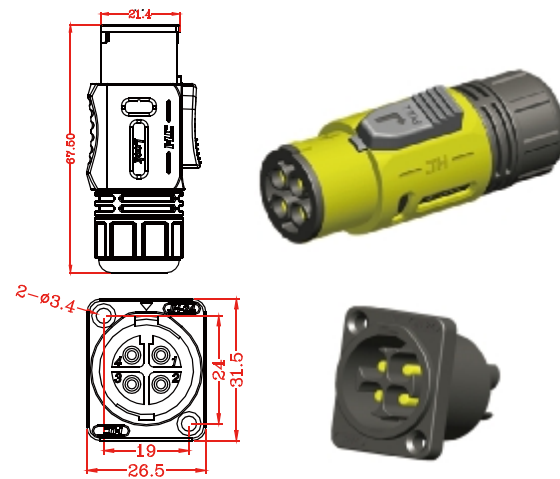

JH-M24-MDF01

Figure No.(图号)
JH-M24-MDF01-2P
JH-M24-MDF01-3P
JH-M24-MDF01-4P
JH-M24-MDF01-8P




JH-M24-FQM01

Figure No.(图号)
JH-M24-FQM01-2P
JH-M24-FQM01-3P
JH-M24-FQM01-4P
JH-M24-FQM01-8P






Simple parameter description:
Rated voltage & current:
2/3/4: 500V DC/AC 25A
8P : 300V DC/AC 8A
Insulation voltage: DC 3KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67 / 68
Operating temper ature: -40 ~105℃
Assembly cable diameter: 6~11mm

简要参数描述:
额定电压及电流:
2/3/4: 500V DC/AC 25A
8P : 300V DC/AC 8A
绝缘电压: DC 3KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / 68
工作温度: -40 ~105℃
装配电缆直径: 6~11mm

Installation method

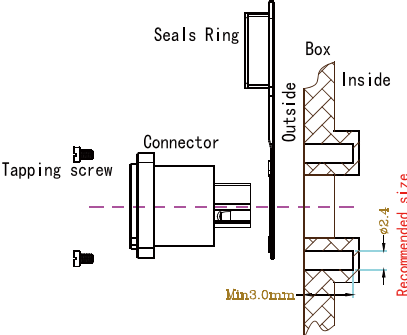


Mark "S"



Customized

P40

JH-25 series

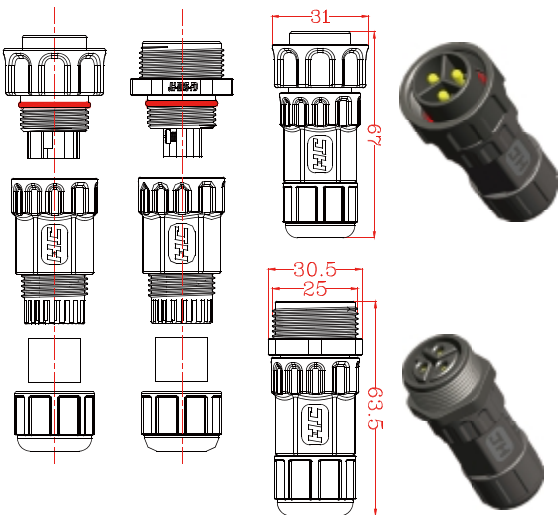


JH-M25-MDM01

Figure No.(图号)
JH-M25-MDM01-2P
JH-M25-MDM01-2S
JH-M25-MDM01-3P
JH-M25-MDM01-3P
JH-M25-MDM01-4P

JH-M25-FDF01

Figure No.(图号)
JH-M25-FDF01-2P
JH-M25-FDF01-2S
JH-M25-FDF01-3P
JH-M25-FDF01-3S
JH-M25-FDF01-4P

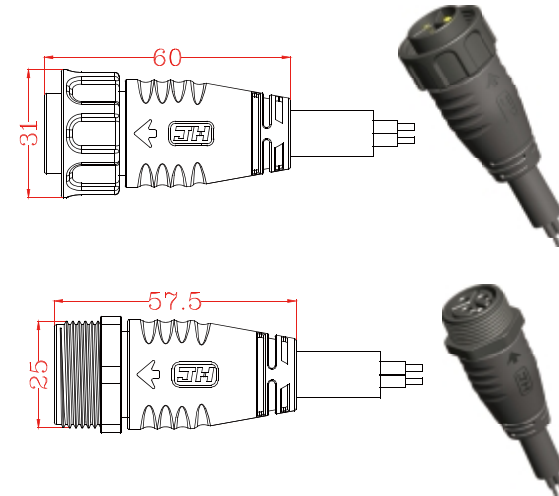

JH-M25-MDM11

Figure No.(图号)
JH-M25-MDM11-2P
JH-M25-MDM11-3P
JH-M25-MDM11-4P

JH-M25-FDF11


Figure No.(图号)
JH-M25-FDF11-2P
JH-M25-FDF11-3P
JH-M25-FDF11-4P



Mark "S"

Simple parameter description:
Rated voltage & current:
2/3/4: 500V DC/AC 30A
Insulation voltage: DC 3KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67 / 68
Operating temper ature: -40 ~105℃
Assembly cable diameter: 6~11mm
Moding cable diameter: 6~14mm

简要参数描述:
额定电压及电流:
2/3/4: 500V DC/AC 30A
绝缘电压: DC 3KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / 68
工作温度: -40 ~105℃
装配电缆直径: 6~11mm
注塑电缆直径: 6~14mm

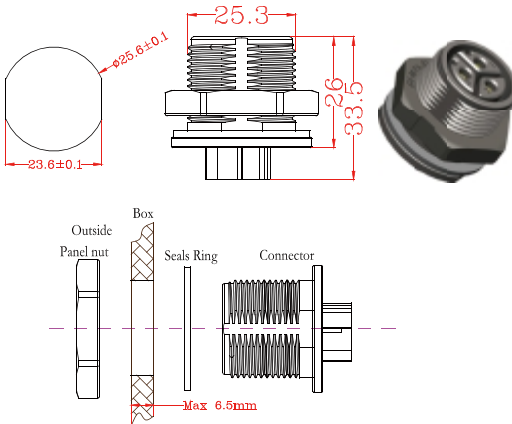

JH-M25-FFF11

Figure No.(图号)
JH-M25-FFF01-2P
JH-M25-FFF01-2S
JH-M25-FFF01-3P
JH-M25-FFF01-3S
JH-M25-FFF01-4P






Figure No.(图号)
JH-M25-FSC01

P41



JH-C01 series

储能设备交流连接器
Energy storage equipment AC connector

JH-C01-MDM01-3S

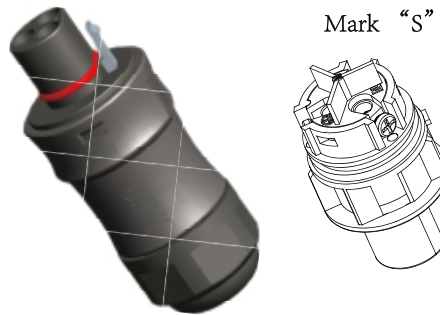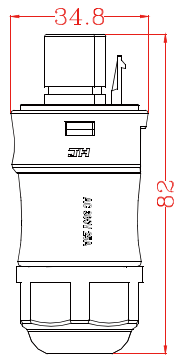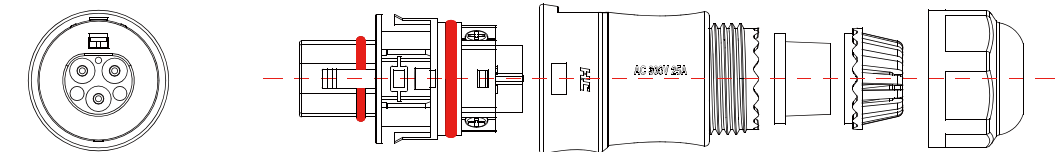

JH-C01-FDF01-3S

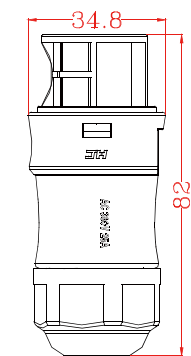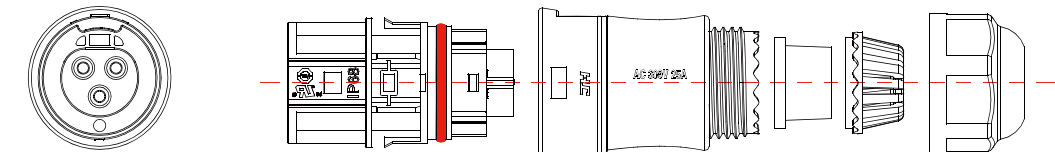

Simple parameter description:
Rated voltage & current: 300V DC/AC 25A
Insulation voltage: DC 3750V 2mA 60s
Insulation resistance: DC 1000V 200MΩ
IP-Code: IP67 / 68
Operating temperature: -40 ~105℃
Assembly cable diameter: 9~13mm


光伏逆变器交流连接器
Photovoltaic Inverter AC connector

简要参数描述:
额定电压及电流: 300V DC/AC 25A
绝缘电压: DC 3750V 2mA 60s
绝缘电阻: DC 1000V 200MΩ
IP防护等级: IP67 / 68
工作温度: -40 ~105℃
装配电缆直径: 9-13mm


JH-C04 series

光伏逆变器直流连接器
Photovoltaic Inverter DC connector

JH-C04-FDM-XX




可选金属端子: 冲压件




1500V 40A

可选金属端子: 车床件




1500V 70A


JH-C04-FRM-XX



JH-C04-MDF-XX




可选金属端子: 冲压件




1500V 40A

可选金属端子: 车床件




1500V 70A

JH-C04-MRF-XX




XX:
14: 14AWG (2.5mm²)
12: 12AWG (4.0mm²)
10: 10AWG (6.0mm²)
08: 8 AWG (10mm²)


两公一母
BC40-2M1F 2 Male to 1 Female

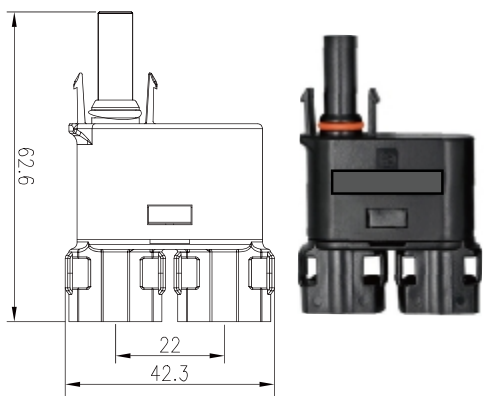


两母一公
BC40-2F1M 2 Female to 1 Male

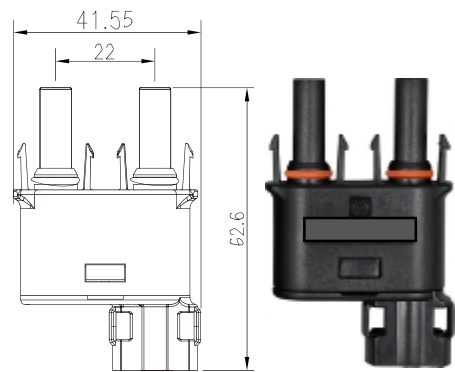

三公一母
BC50-3M1F 3 Male to 1 Female




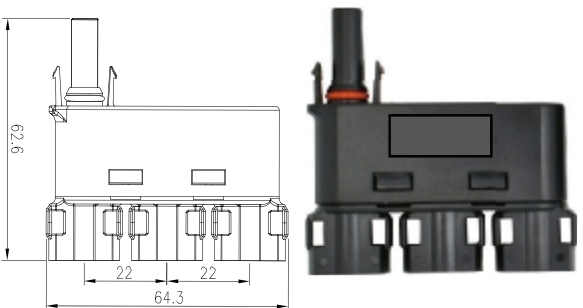


三母一公
BC50-3F1M 3 Female to 1 Male

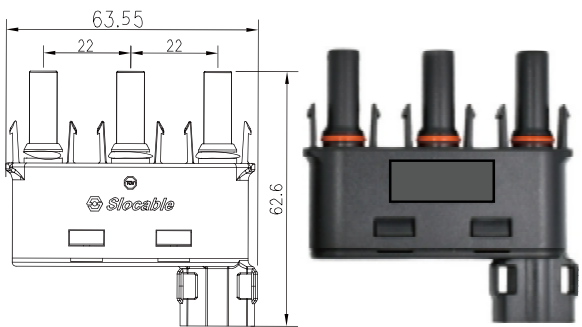




保险丝规格

CN40-FURY- ** FUSE Specification (2~30A)

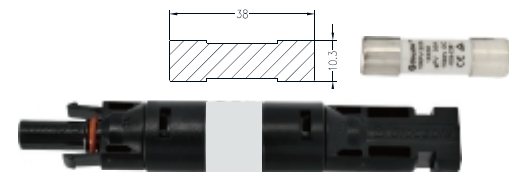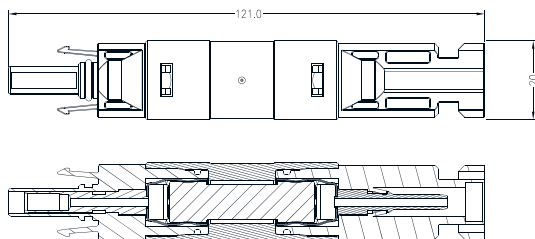


保险丝规格

CN40-FURY- ** FUSE Specification (2~30A)

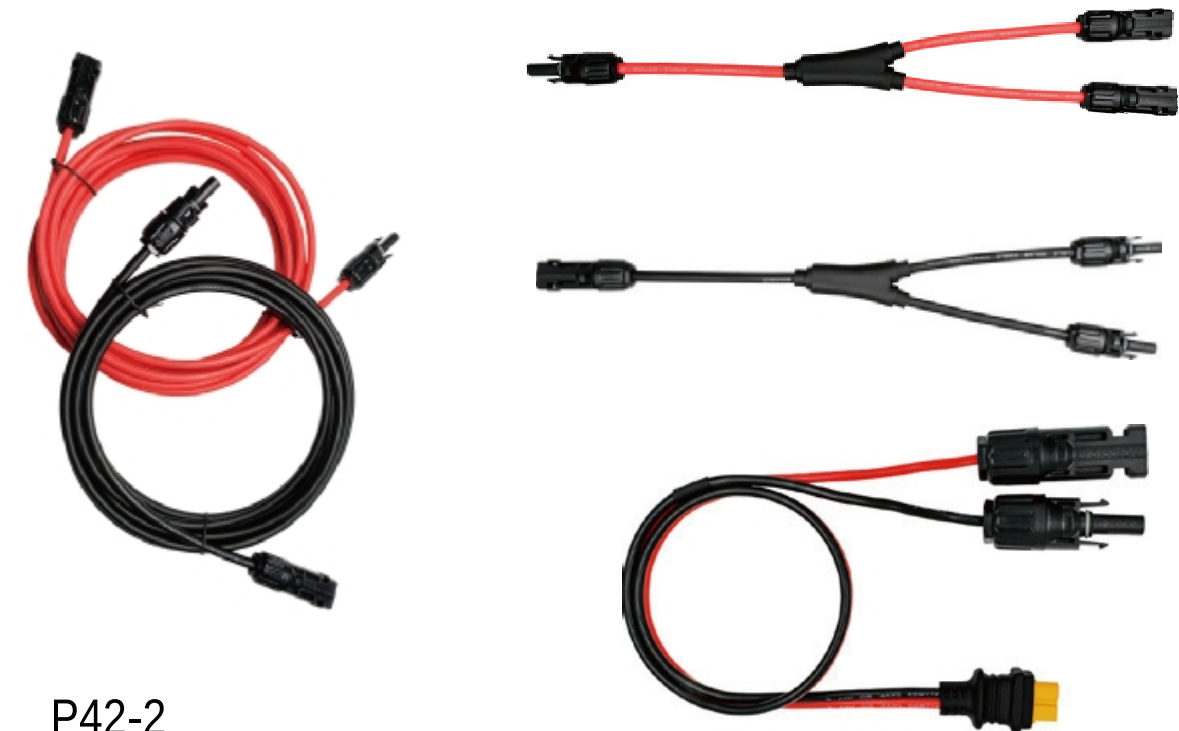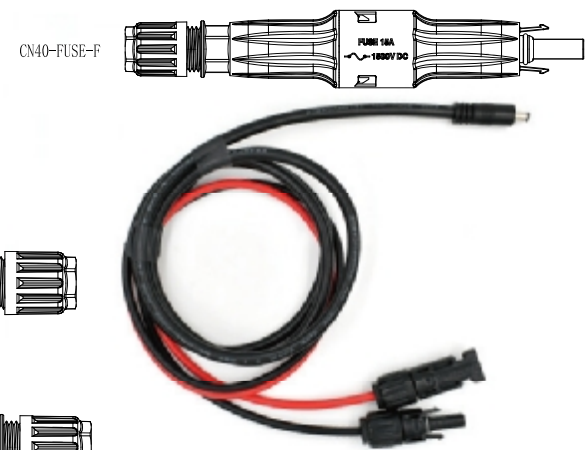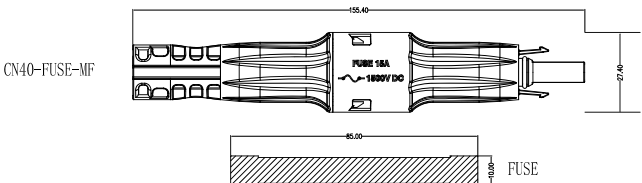


P42-2

Water interceptor (截水器)

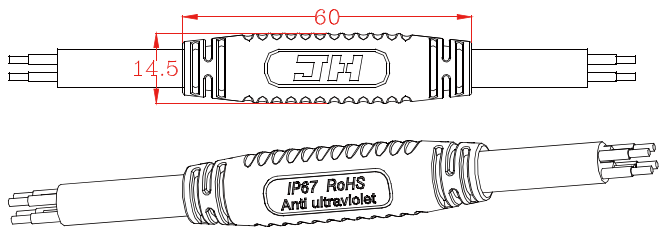

Values for cable clamp: 3~8.5mm
电缆直径: 3~8.5mm

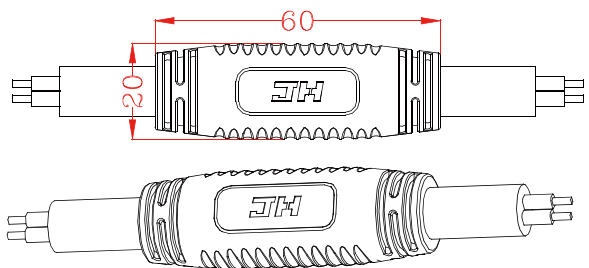

Values for cable clamp: 8~12mm
电缆直径: 8~12mm

Figure No.(图号)
JH-JSQ-A-2P
JH-JSQ-A-3P
JH-JSQ-A-4P
JH-JSQ-A-5P
JH-JSQ-A-6P

Figure No.(图号)
JH-JSQ-B-2P
JH-JSQ-B-3P
JH-JSQ-B-4P
JH-JSQ-B-5P
JH-JSQ-B-6P

- Simple parameter description:
- 1. Rated voltage: Refer to wire specification
 - 2. Rated current: Refer to wire specification
 - 3. Insulation voltage: Refer to wire specification
 - 4. Insulation resistance: Refer to wire specification
 - 5. Operating temperature: -40 to 105℃
 - 6. Protection degree (IP-Code): IP67 IP68
 - 7. RoHS、UL94V-0、Anti-UV (UV-function)


- 简单参数描述:
- 1. 额定电压: 参考导线规格
 - 2. 额定电流: 参考导线规格
 - 3. 绝缘电压: 参考导线规格
 - 4. 绝缘电阻: 参考导线规格
 - 5. 工作温度: -40至105℃
 - 6. 防护等级 (IP代码): IP67 IP68
 - 7. RoHS、UL94V-0、防紫外线 (UV)




Underground lamp Water interceptor
Water tank Water interceptor
地埋灯截水器、水箱截水器

JH-RJ45 series

Socket without exoxy potting compound (插座不灌胶款) 8P8C Cat.6


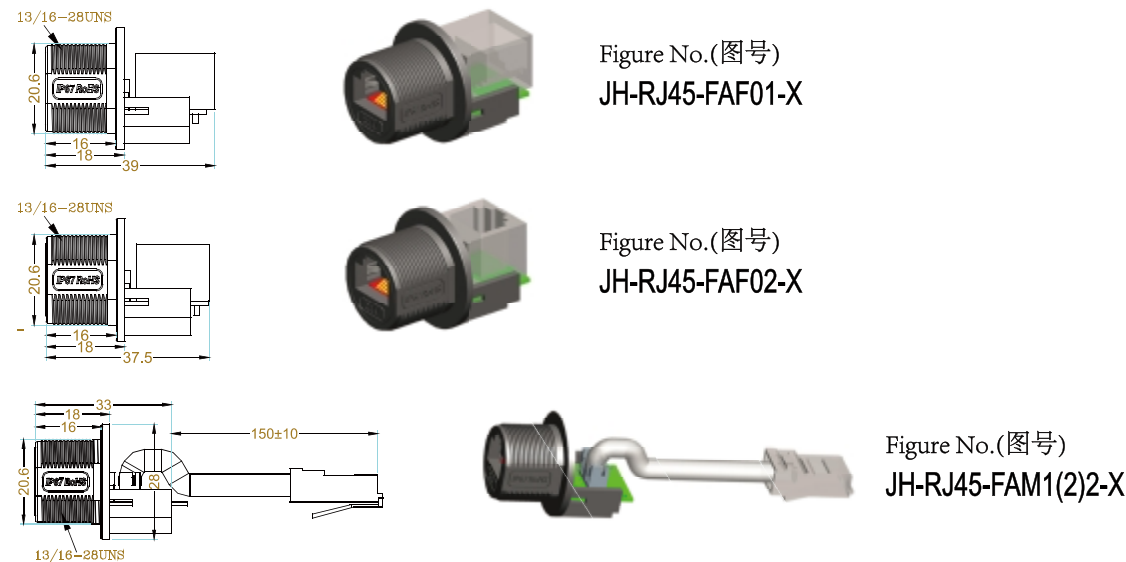


Socket with exoxy potting compound (插座灌胶款) 8P8C Cat.6

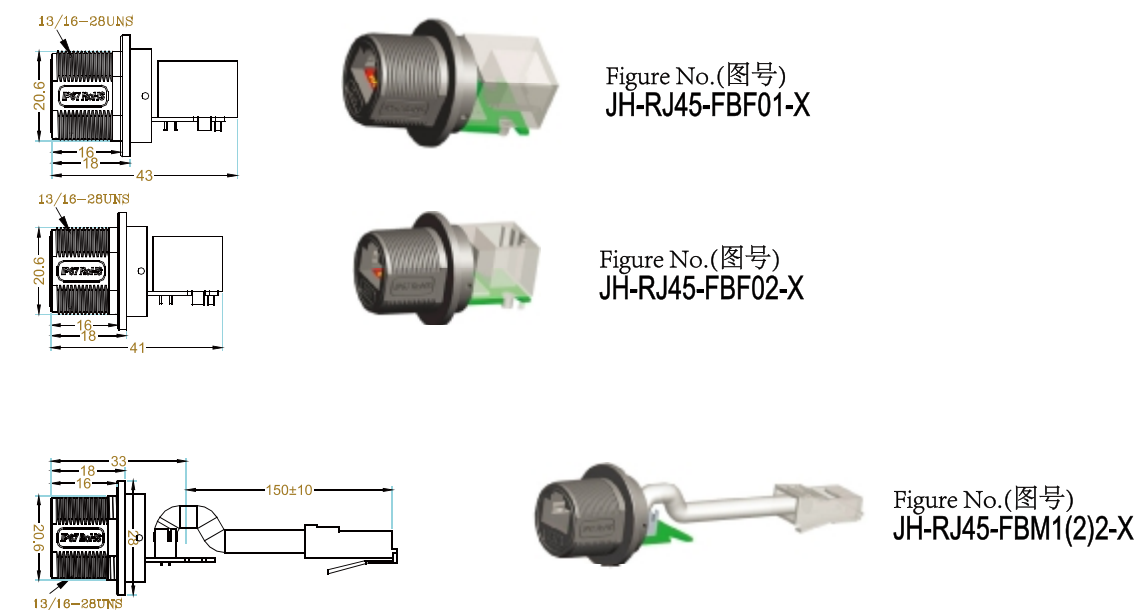

Installation method

Panel cutout

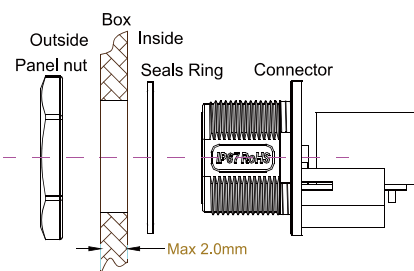

Simple parameter description:
Rated voltage & current: 60-100V DC/AC
Insulation voltage: DC 100V 2mA 60s
Insulation resistance: DC 100V 200MΩ
IP-Code: IP67 / 68
Operating temper ature: -40 ~105℃

简要参数描述:
额定电压及电流: 60-100V DC/AC
绝缘电压: DC 100V 2mA 60s
绝缘电阻: DC 100V 200MΩ
IP防护等级: IP67 / 68
工作温度: -40 ~105℃

JH-RJ45 series

JH-RJ45-MSM02

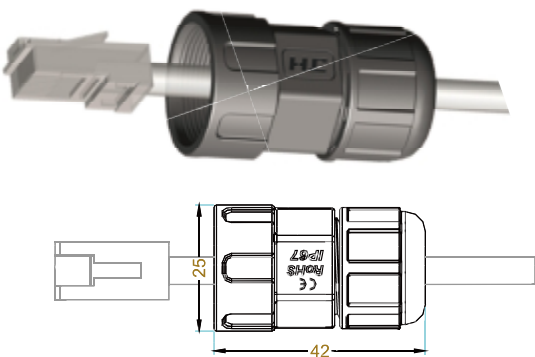


Figure No.(图号)
JH-RJ45-MSM02

- NOTES
1. Operating temperature: -40 to 105℃
 2. Protection degree (IP-Code) : IP67
 - 3: RoHS、UL94V-0、Anti-UV (UV-function)
 - 4: Values for cable clamp:4.5-6.5mm

RJ45 plug and cable required additional procurement
(RJ45插头和线缆需要额外采购，产品未配)


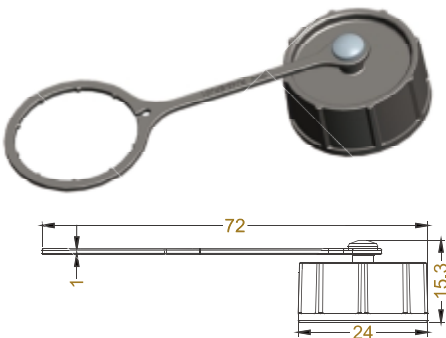


Figure No.(图号)
JH-RJ45-FSC01


- NOTES
1. Operating temperature: -40 to 105℃
 2. Protection degree (IP-Code) : IP67
 3. RoHS、UL94V-0、Anti-UV (UV-function)
 4. Operating cycles: 3000

Installation method

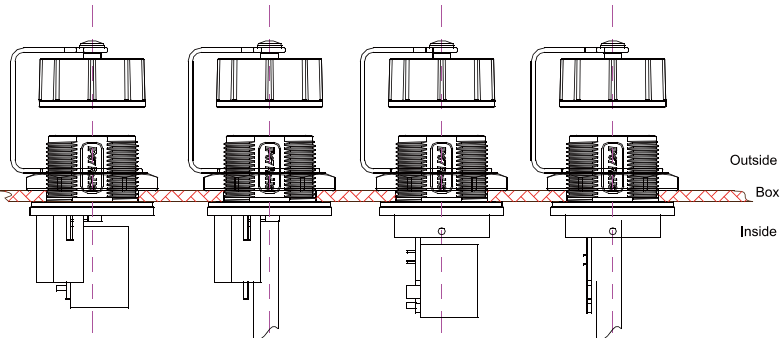


JH-Y series

Figure No.(图号)
JH-Y01-1P2-X
JH-Y01-1P3-X

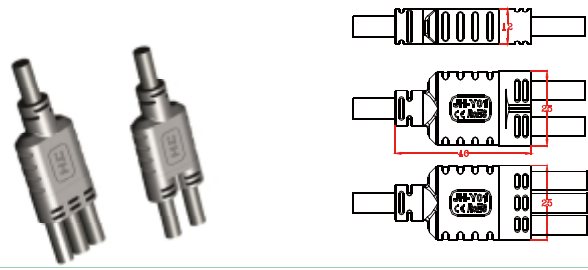


Main cable diameter : 3-8.5mm
Branch cable diameter : 3-8.5mm
主线直径 : 3-8.5mm
支线直径 : 3-8.5mm

Figure No.(图号)
JH-Y02-1P2-X
JH-Y02-1P3-X

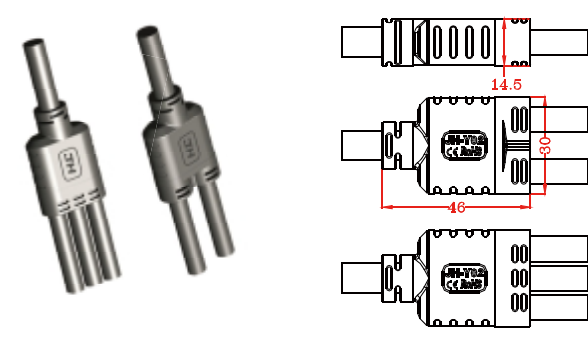


Main cable diameter : 3-11mm
Branch cable diameter : 3-10mm
主线直径 : 3-11mm
支线直径 : 3-10mm

Figure No.(图号)
JH-Y04-1P3-X
JH-Y04-1P4-X
JH-Y04-1P5-X
JH-Y04-1P6-X

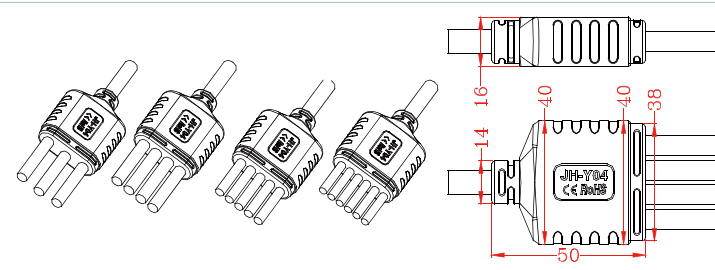


Main cable diameter : 5-11mm
Branch cable diameter : 3-11mm
主线直径 : 5-11mm
支线直径 : 3-11mm

Figure No.(图号)
JH-Y07-1P3-X
JH-Y07-1P4-X
JH-Y07-1P5-X
JH-Y07-1P6-X

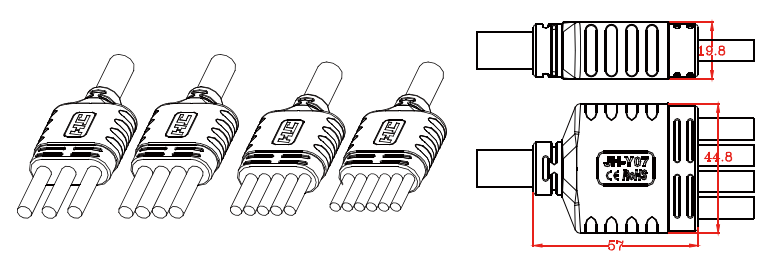

Main cable diameter : 6-14mm
Branch cable diameter : 3-12mm
主线直径 : 6-14mm
支线直径 : 3-12mm

Figure No.(图号)
JH-Y10-1P6-X
JH-Y10-1P7-X
JH-Y10-1P8-X

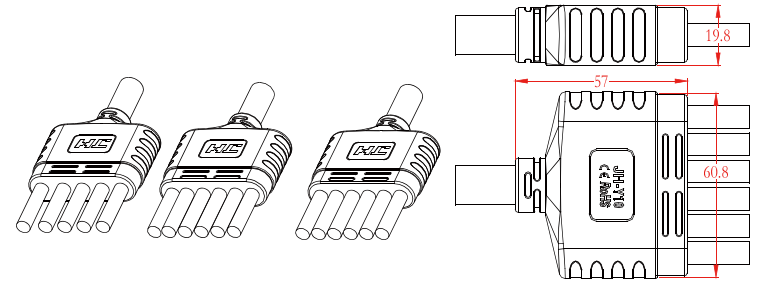


Main cable diameter : 6-14mm
Branch cable diameter : 3-12mm
主线直径 : 6-14mm
支线直径 : 3-12mm

Simple parameter description:
1. Rated voltage: Equal to rated voltage of cable
2. Rated current: equal to rated current of cable
3. Insulation voltage: Equal to insulation voltage of cable
4. Insulation resistance: 200MΩ 500V
5. Operating temperature: -40 to 105℃
6. Protection degree (IP-Code): IP65/6/7
7: RoHS、UL94V-0、Anti-UV (UV-function)
8: lectrical connection: Can be customized (Series or Parallel)

简要参数描述:
1. 额定电压: 按线材额定电压
2. 额定电流: 按线材额定电流
3. 耐压: 按线材耐压
4. 绝缘电阻: 200MΩ 500V
5. 使用环境温度: -40 to 105℃
6. IP等级: IP65/6/7
7: RoHS、UL94V-0、耐UV
8: 电气连接: 可定制 (串联或并联)

JH-Y series

Figure No.(图号)
JH-Y03-1Y2-X

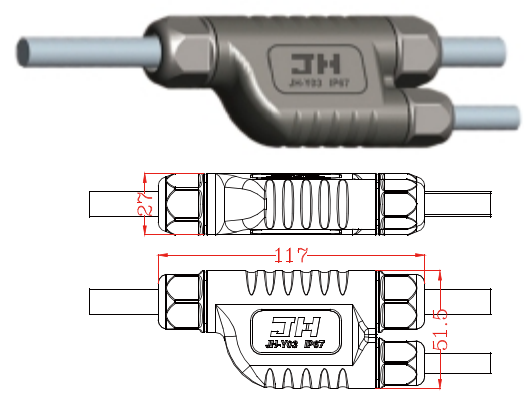

NOTES
1. Rated voltage: Equal to rated voltage of cable
2. Rated current: equal to rated current of cable
3. Insulation voltage: Equal to insulation voltage of cable
4. Insulation resistance: 500MΩ 1000V
5. Operating temperature: -40 to 105 C
6. Protection degree (IP-Code): IP67
7: RoHS、UL94V-0、Anti-UV (UV-function)
8: Main cable diameter : 12-15mm
Branch cable diameter : 6-10mm
9: Attended mode: Welding
10: Electrical connection: Can be customized (Series or Parallel)

参数
1. 额定电压: 按线材额定电压
2. 额定电流: 按线材额定电流
3. 耐压: 按线材耐压
4. 绝缘电阻: 500MΩ 1000V
5. 使用环境温度: -40 to 105℃
6. IP等级: IP67
7: RoHS、UL94V-0、耐UV
8: 主线直径 : 12-15mm
支线直径 : 6-10mm
9: 焊接方式: 焊线
10: 电气连接: 可定制 (串联或并联)



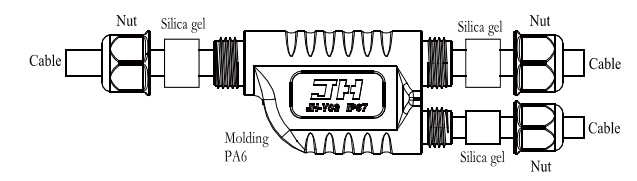


Figure No.(图号)
JH-Y05-1Y2-X

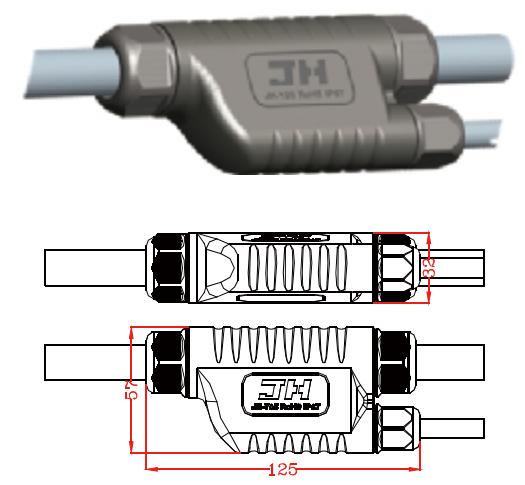


NOTES
1. Rated voltage: Equal to rated voltage of cable
2. Rated current: equal to rated current of cable
3. Insulation voltage: Equal to insulation voltage of cable
4. Insulation resistance: 500MΩ 1000V
5. Operating temperature: -40 to 105 C
6. Protection degree (IP-Code): IP67
7: RoHS、UL94V-0、Anti-UV (UV-function)
8: Main cable diameter : 14-18mm
Branch cable diameter : 6-10mm
9: Attended mode: Welding
10: Electrical connection: Can be customized (Series or Parallel)

参数
1. 额定电压: 按线材额定电压
2. 额定电流: 按线材额定电流
3. 耐压: 按线材耐压
4. 绝缘电阻: 500MΩ 1000V
5. 使用环境温度: -40 to 105℃
6. IP等级: IP67
7: RoHS、UL94V-0、耐UV
8: 主线直径 : 14-18mm
支线直径 : 6-10mm
9: 焊接方式: 焊线
10: 电气连接: 可定制 (串联或并联)

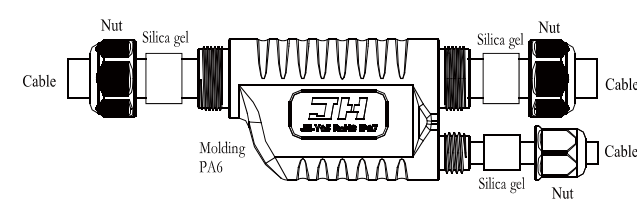


Customized (定制类连接方式)

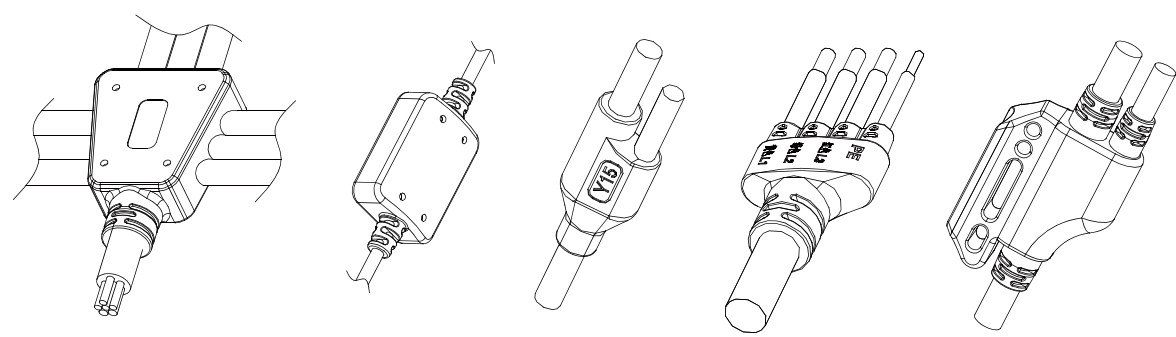

JH-T series

Figure No.(图号)
JH-T01

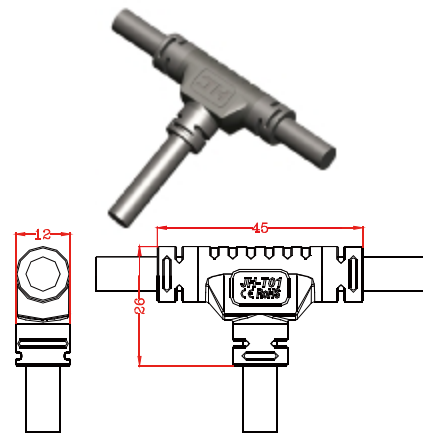


NOTES

- 1. Rated voltage: Equal to rated voltage of cable
- 2. Rated current: equal to rated current of cable
- 3. Insulation voltage: Equal to insulation voltage of cable
- 4. Insulation resistance: 200MΩ 500V
- 5. Operating temperature: -40 to 105℃
- 6. Protection degree (IP-Code) : IP65/6/7
- 7: RoHS、UL94V-0、Anti-UV (UV-function)
- 8: Main cable diameter : 4-8.5mm
Branch cable diameter : 3-8.5mm
- 9: Attended mode: Welding or Welded PCB board
- 10: Electrical connection: Can be customized (Series or Parallel)

参数

- 1. 额定电压: 按线材额定电压
- 2. 额定电流: 按线材额定电流
- 3. 耐压: 按线材耐压
- 4. 绝缘电阻: 200MΩ 500V
- 5. 使用环境温度: -40 to 105℃
- 6. IP等级: IP65/6/7
- 7: RoHS、UL94V-0、耐UV
- 8: 主线直径: 4-8.5mm
支线直径: 3-8.5mm
- 9: 焊接方式: 焊线或焊PCB
- 10: 电气连接: 可定制 (串联或并联)

Figure No.(图号)
JH-T02

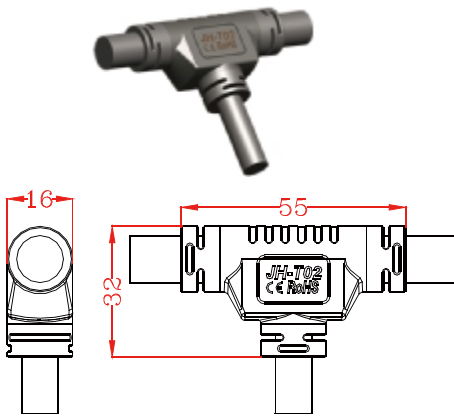

NOTES


- 1. Rated voltage: Equal to rated voltage of cable
- 2. Rated current: equal to rated current of cable
- 3. Insulation voltage: Equal to insulation voltage of cable
- 4. Insulation resistance: 200MΩ 500V
- 5. Operating temperature: -40 to 105℃
- 6. Protection degree (IP-Code) : IP65/6/7
- 7: RoHS、UL94V-0、Anti-UV (UV-function)
- 8: Main cable diameter : 7-11mm
Branch cable diameter : 6-11mm
- 9: Attended mode: Welding or Welded PCB board
- 10: Electrical connection: Can be customized (Series or Parallel)

参数

- 1. 额定电压: 按线材额定电压
- 2. 额定电流: 按线材额定电流
- 3. 耐压: 按线材耐压
- 4. 绝缘电阻: 200MΩ 500V
- 5. 使用环境温度: -40 to 105℃
- 6. IP等级: IP65/6/7
- 7: RoHS、UL94V-0、耐UV
- 8: 主线直径: 7-11mm
支线直径: 6-11mm
- 9: 焊接方式: 焊线或焊PCB
- 10: 电气连接: 可定制 (串联或并联)

JH-T series

Figure No.(图号)
JH-T05

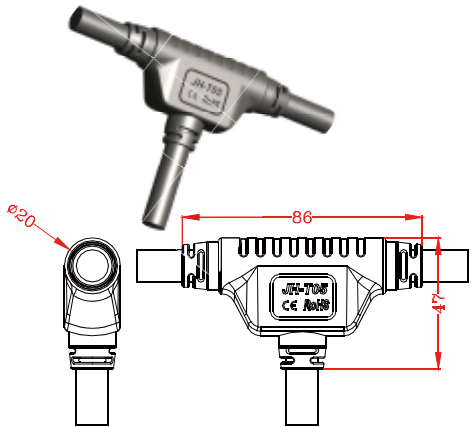


NOTES

- 1. Rated voltage: Equal to rated voltage of cable
- 2. Rated current: equal to rated current of cable
- 3. Insulation voltage: Equal to insulation voltage of cable
- 4. Insulation resistance: 500MΩ 1000V
- 5. Operating temperature: -40 to 105℃
- 6. Protection degree (IP-Code) : IP65/6/7
- 7: RoHS、UL94V-0、Anti-UV (UV-function)
- 8: Main cable diameter : 5-10mm
Branch cable diameter : 5-10mm
- 9: Attended mode: Welding
- 10: Electrical connection: Can be customized (Series or Parallel)

参数

- 1. 额定电压: 按线材额定电压
- 2. 额定电流: 按线材额定电流
- 3. 耐压: 按线材耐压
- 4. 绝缘电阻: 500MΩ 1000V
- 5. 使用环境温度: -40 to 105℃
- 6. IP等级: IP65/6/7
- 7: RoHS、UL94V-0、耐UV
- 8: 主线直径: 5-10mm
支线直径: 5-10mm
- 9: 焊接方式: 焊线
- 10: 电气连接: 可定制 (串联或并联)

Figure No.(图号)
JH-T06

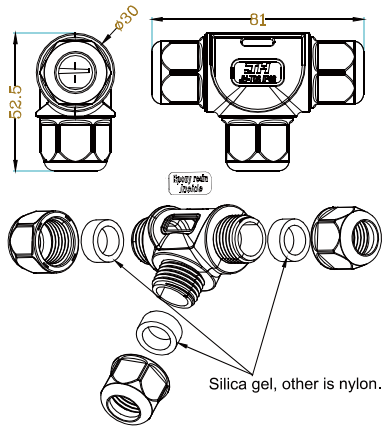


NOTES

- 1. Rated voltage: Equal to rated voltage of cable
- 2. Rated current: equal to rated current of cable
- 3. Insulation voltage: Equal to insulation voltage of cable
- 4. Insulation resistance: 200MΩ 500V
- 5. Operating temperature: -40 to 105℃
- 6. Protection degree (IP-Code) : IP67
- 7: RoHS、UL94V-0、Anti-UV (UV-function)
- 8: Main cable diameter : 5-12mm
Branch cable diameter : 5-12mm
- 9: Attended mode: Welding or Welded PCB board
- 10: Electrical connection: Can be customized (Series or Parallel)

参数


- 1. 额定电压: 按线材额定电压
- 2. 额定电流: 按线材额定电流
- 3. 耐压: 按线材耐压
- 4. 绝缘电阻: 200MΩ 500V
- 5. 使用环境温度: -40 to 105℃
- 6. IP等级: IP67
- 7: RoHS、UL94V-0、耐UV
- 8: 主线直径: 5-12mm
支线直径: 5-12mm
- 9: 焊接方式: 焊线或焊PCB
- 10: 电气连接: 可定制 (串联或并联)

JH-L21 series

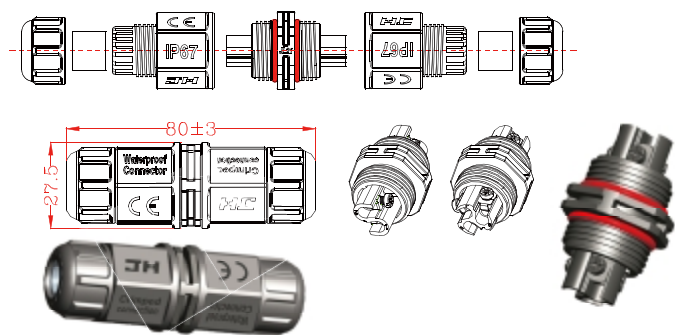

JH-M21-FLF


Figure No.(图号)
JH-M21-FLF01-2S-X
JH-M21-FLF01-3S-X

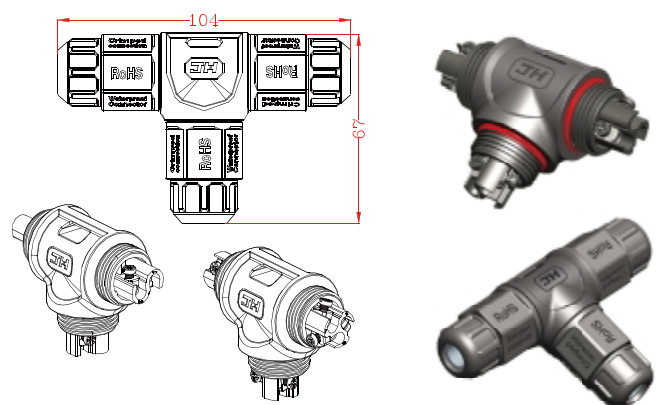

JH-M21-FTF

Figure No.(图号)
Parallel circuit (并联)
JH-M21-FTF01-2S-X
JH-M21-FTF01-3S-X

Series circuit (串联)
JH-M21-FTF02-2S-X
JH-M21-FTF02-3S-X

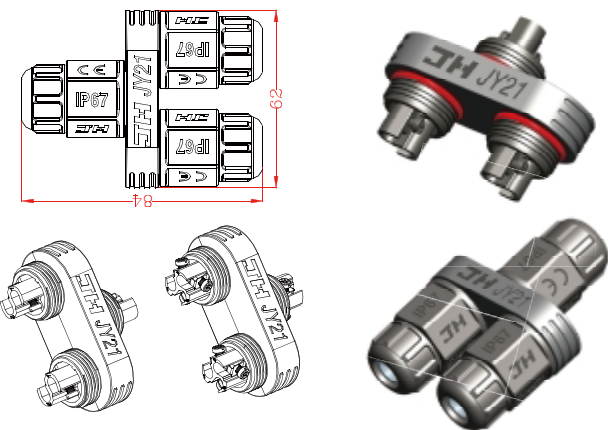

JH-M21-FYF


Figure No.(图号)
Parallel circuit (并联)
JH-M21-FYF01-2S-X
JH-M21-FYF01-3S-X

Series circuit (串联)
JH-M21-FYF02-2S-X
JH-M21-FYF02-3S-X

Simple parameter description:
Rated voltage & current: 500V DC/AC 25A
Insulation voltage: DC 3KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67 / 68
Operating temperature: -40 ~105℃
Assembly cable diameter: 4 ~10.5mm

简要参数描述:
额定电压及电流: 500V DC/AC 25A
绝缘电压: DC 3KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / 68
工作温度: -40 ~105℃
装配电缆直径: 4 ~10.5mm

JH-L21 series

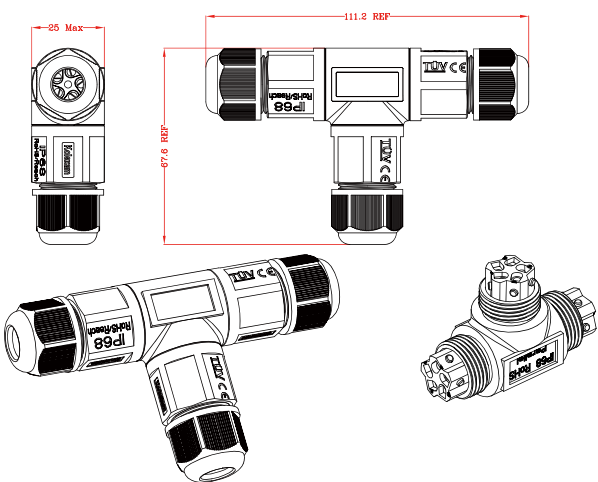


JH-PDA-FTF

Figure No.(图号)
Parallel circuit (并联)
JH-PDA-FTF01-4S-X
JH-PDA-FTF01-5S-X

Simple parameter description:
Rated voltage & current:
300V/20A, IP67
Assembly cable diameter:
5.5 ~8mm

简要参数描述:
额定电压及电流:
300V/20A, IP67
装配电缆直径:
6 ~10mm

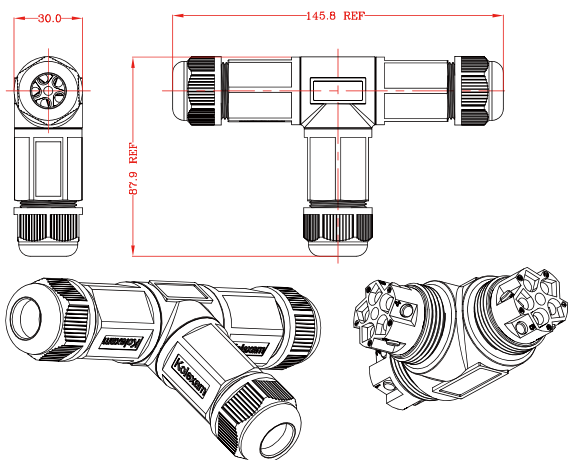

JH-PDA-L-FTF

Figure No.(图号)
Parallel circuit (并联)
JH-PDA-L-FTF01-4S-X
JH-PDA-L-FTF01-5S-X

Simple parameter description:
Rated voltage & current:
300V/20A, IP67
Assembly cable diameter:
5.5 ~8mm

简要参数描述:
额定电压及电流:
300V/40A, IP67
装配电缆直径:
10 ~14.5mm

JH-Y09


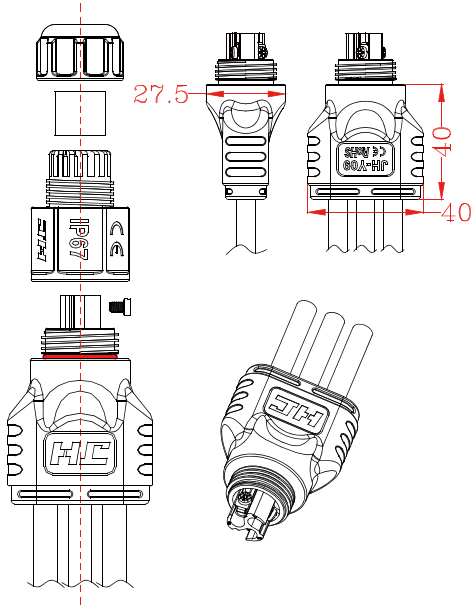


Figure No.(图号)
JH-Y09-1Y2-2S-X
JH-Y09-1Y2-3S-X




Figure No.(图号)
JH-Y09-1Y3-2S-X
JH-Y09-1Y3-3S-X





Figure No.(图号)
JH-Y09-1Y4-2S-X
JH-Y09-1Y4-3S-X

Simple parameter description:
Rated voltage & current: Refer to wire specification
Insulation voltage: DC 3KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67 / 68
Operating temperature: -40 ~105℃
Assembly cable diameter: 4 ~10.5mm

简要参数描述:
额定电压及电流: 参考线材规格
绝缘电压: DC 3KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / 68
工作温度: -40 ~105℃
装配电缆直径: 4 ~10.5mm

JH-KJ series

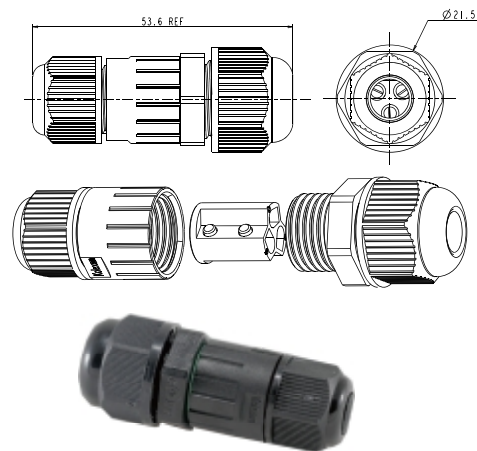


JH-KJ-PG9-07

Figure No.(图号)
JH-KJ-PG9-07-2S
JH-KJ-PG9-07-3S

Simple parameter description:
Rated voltage & current:
300V/20A, IP67
Assembly cable diameter:
5.5~8mm

简要参数描述:
额定电压及电流:
300V/20A, IP67
装配电缆直径:
5.5~8mm

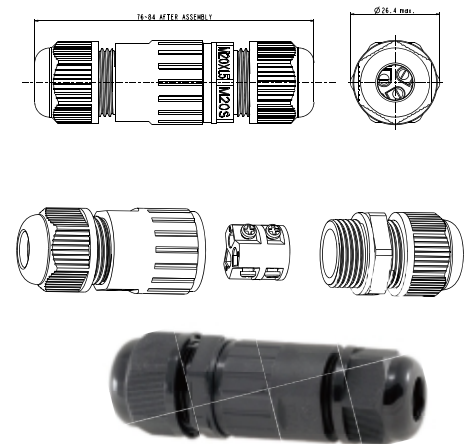


JH-KJ-M20S-11

Figure No.(图号)
JH-KJ-M20S-11-2S
JH-KJ-M20S-11-3S
JH-KJ-M20S-11-4S
JH-KJ-M20S-11-5S
JH-KJ-M20S-11-6S

Simple parameter description:
Rated voltage & current:
450V/20A, IP67
Assembly cable diameter:
7~10.5mm

简要参数描述:
额定电压及电流:
450V/20A, IP67
装配电缆直径:
7~10.5mm

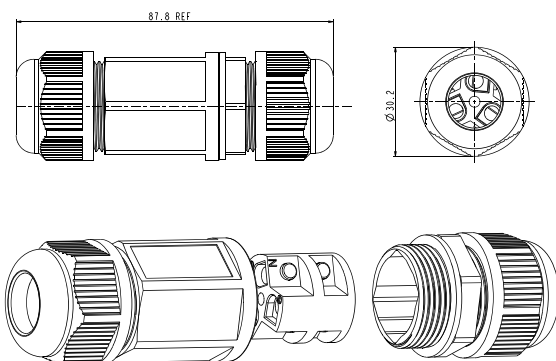


JH-KJ-M25S-14

Figure No.(图号)
JH-KJ-M25S-14-2S
JH-KJ-M25S-14-3S
JH-KJ-M25S-14-4S
JH-KJ-M25S-14-5S
JH-KJ-M25S-14-6S
JH-KJ-M25S-14-8S

Simple parameter description:
Rated voltage & current:
2/3/4/5: 600V/40A, IP67
6/8: 400V/20A, IP67
Assembly cable diameter:
10~14.5mm

简要参数描述:
额定电压及电流:
2/3/4/5: 600V/40A, IP67
6/8: 400V/20A, IP67
装配电缆直径:
10~14.5mm

JH-KJ series

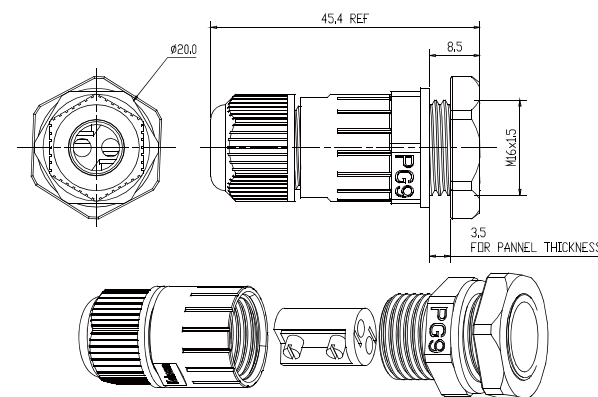


JH-KJP-PG9-07

Figure No.(图号)
JH-KJP-PG9-07-2S
JH-KJP-PG9-07-3S

Simple parameter description:
Rated voltage & current:
300V/20A, IP67
Assembly cable diameter:
5.5~8mm

简要参数描述:
额定电压及电流:
300V/20A, IP67
装配电缆直径:
5.5~8mm

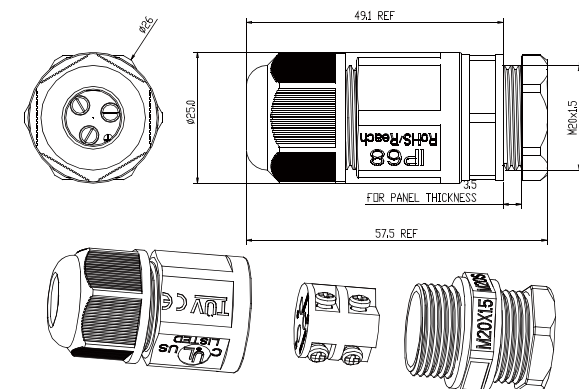

JH-KJP-M20S-11

Figure No.(图号)
JH-KJP-M20S-11-2S
JH-KJP-M20S-11-3S
JH-KJP-M20S-11-4S
JH-KJP-M20S-11-5S
JH-KJP-M20S-11-6S

Simple parameter description:
Rated voltage & current:
450V/20A, IP67
Assembly cable diameter:
7~10.5mm

简要参数描述:
额定电压及电流:
450V/20A, IP67
装配电缆直径:
7~10.5mm

Cable tail waterproof seal（电缆尾部防水密封）

JH-KJ16-DT


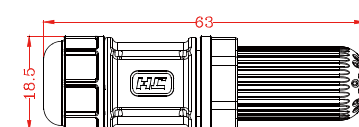


Figure No.(图号)
JH-KJ16-DT



IP67/68
Assembly cable diameter（装配电缆直径）:
3~9.2mm

JH-KJ21-DT






Figure No.(图号)
JH-KJ21-DT

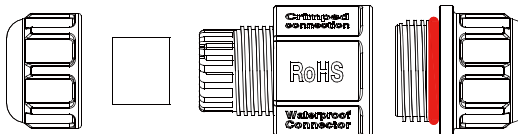

IP67/68
Assembly cable diameter（装配电缆直径）:
4~10.5mm


JH-26 series

Figure No.(图号)
JH-M26-FLF-6S

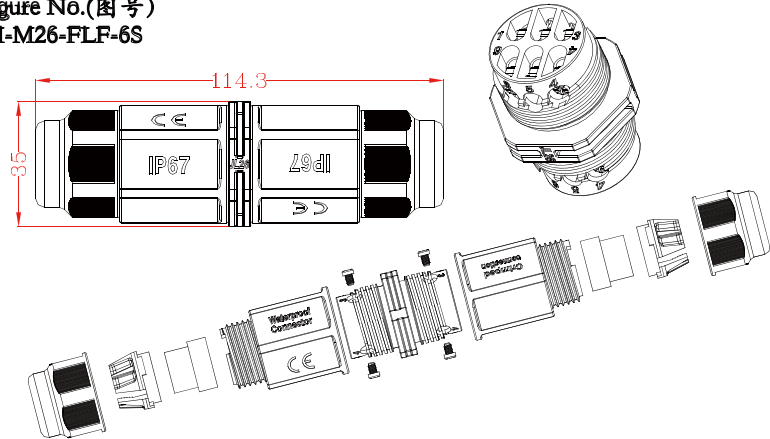


Simple parameter description:
Rated voltage & current: 500V DC/AC 30A
Insulation voltage: DC 3KV 2mA 60s
Insulation resistance: DC 500V 200MΩ
IP-Code: IP67 / 68
Operating temperature: -40 ~ 105℃
Assembly cable diameter: 4 ~ 10.5mm

Figure No.(图号)
JH-M26-FLF-2S-X
JH-M26-FLF-3S-X

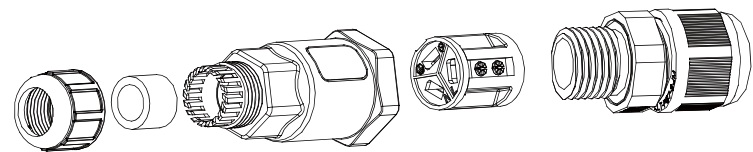

简要参数描述:
额定电压及电流: 500V DC/AC 30A
绝缘电压: DC 3KV 2mA 60s
绝缘电阻: DC 500V 200MΩ
IP防护等级: IP67 / 68
工作温度: -40 ~ 105℃
装配电缆直径: 4 ~ 10.5mm

Figure No.(图号)
JH-M26-1T2-2S-X
JH-M26-1T2-3S-X

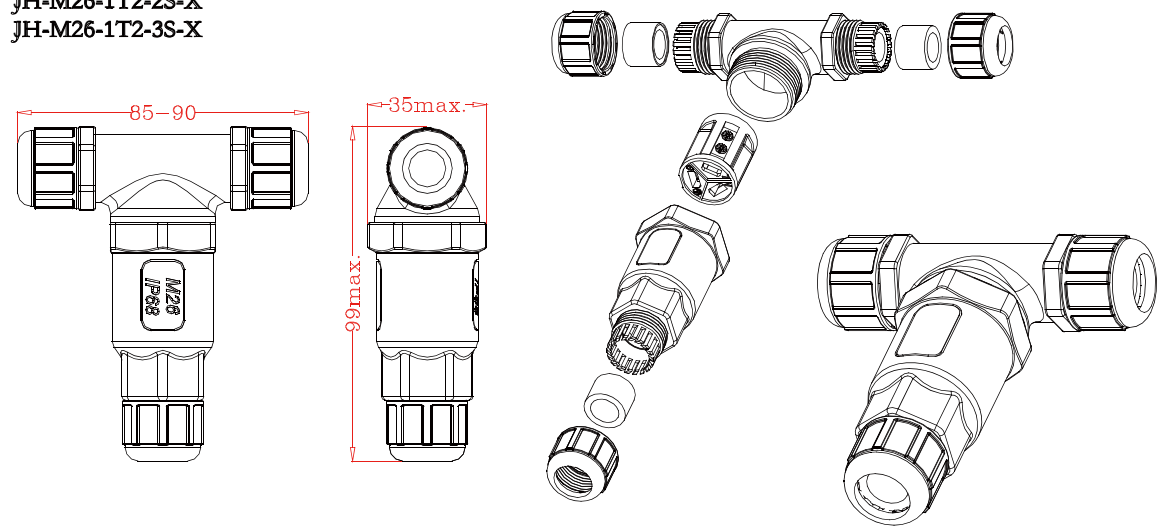

JH-customized series

Customized (定制类产品)

